


LOC/DME I-SXH	APP CRS	Rwy Ldg
108.95	093°	10540
Chan 26(Y)		TDZE 669
		Apt Elev 680

ILS or LOC RWY 10C

CHICAGO O'HARE INTL (ORD)

From GIBNS: RNAV-1 GPS required.			ALSF-2 		MISSED APPROACH: Climb to 4000 on heading 093° and CGT VORTAC R-336 to CGT VORTAC and hold.		
RNAV 1-GPS or RADAR required for procedure entry. DME or RADAR required.							
▼ Simultaneous approach authorized.							
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 120.75 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)		(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC

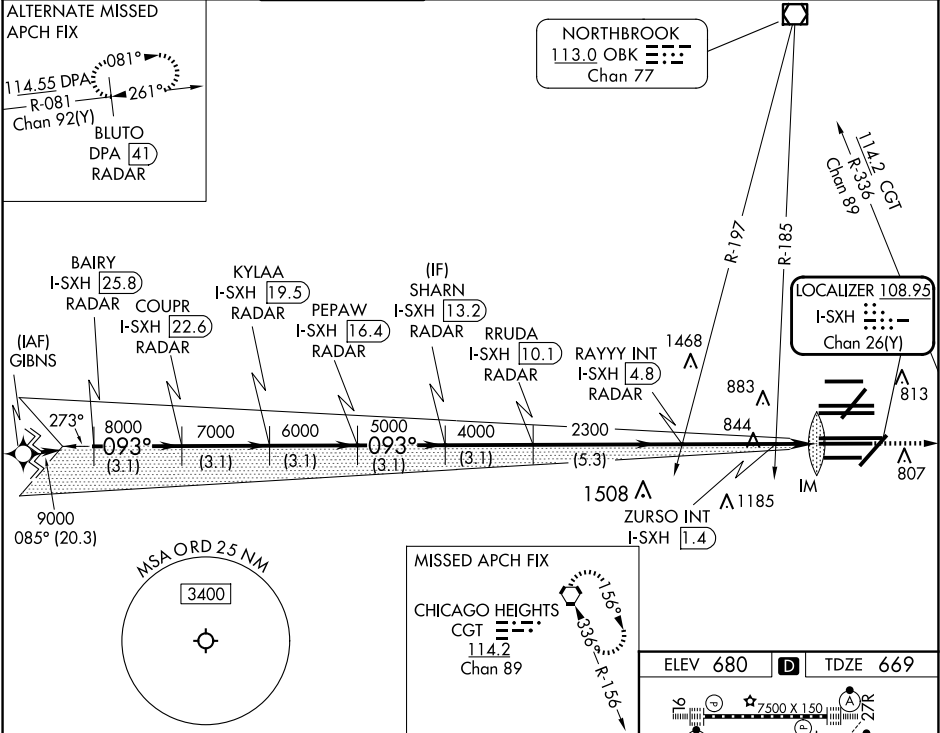

BAIRY I-SXH 25.8 RADAR	COUPR I-SXH 22.6 RADAR	KYLAA I-SXH 19.5 RADAR	PEPAW I-SXH 16.4 RADAR	SHARN I-SXH 13.2 RADAR	RRUDA I-SXH 10.1 RADAR	RAYYY INT I-SXH 4.8 RADAR	ZURSO INT I-SXH 1.4	I-SXH DME ANTENNA
VGSi and ILS glidepath not coincident 4000 (VGSi Angle 3.00/TCH 75).								hdg 093°
CGT R-336								CGT
*LOC only								
GS 3.00° TCH 55								
3.1 NM	3.1 NM	3.1 NM	3.1 NM	3.1 NM	5.3 NM	3.4 NM	1.5 NM	0.1 NM
CATEGORY A								
S-ILS 10C 869/18 200 (200-½)								
S-LOC 10C 1220/24 551 (600-½) 1220/60 551 (600-1¼)								
ZURSO FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)								
S-LOC 10C 1100/24 431 (500-½) 1100/40 431 (500-¾)								

