

WAAS CH 97606 W27A	APP CRS 273°	Rwy Ldg TDZE Apt Elev	6008 826 826
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27



GOSHEN MUNI ((GSH))

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using ASW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA to Rwy 5 and 23. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use ASW altimeter setting and increase LPV DA to 1251 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1346 feet. Increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH:
Climb to 2500 direct JANUG and on 274° track to CPONE and hold.

ASOS 121.45	SOUTH BEND APP CON * 132.05 257.8	CLNC DEL 125.25	UNICOM 123.05 (CTAF) 0
-----------------------	---	---------------------------	----------------------------------

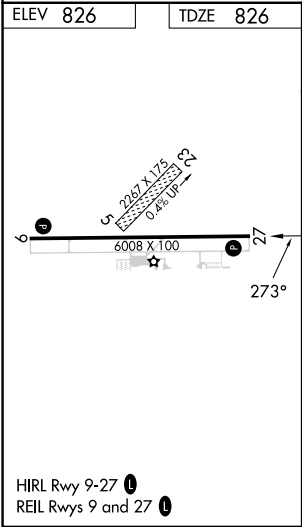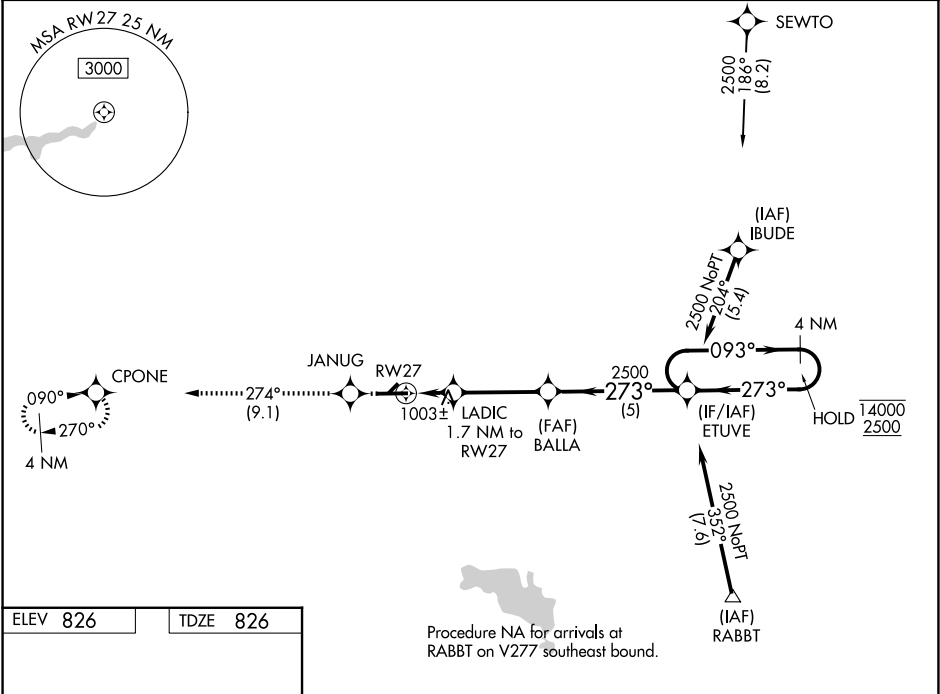

2500	JANUG	CPONE				
	 tr 274°					
			BALLA	ETUVE	4 NM Holding Pattern	
			2500			
			LADIC			
			1.2 NM to RW27	1.7 NM to RW27		
			1400	2500		
			1.2 NM	0.5		
			3.4 NM	5 NM		
					GP 3.00° TCH 49°	
CATEGORY		A		B	C	D
LPV	DA	1212-1½		386 (400-1½)		
LNAV/ VNAV	DA	1307-1¾		481 (500-1½)		
LNAV	MDA	1260-1	434 (500-1)	1260-1¼ 434 (500-1¼)	1260-1½ 434 (500-1½)	
CIRCLING	1300-1	1320-1	1500-2	1560-2¼		
	474 (500-1)	494 (500-1)	674 (700-2)	734 (800-2¼)		

EC-2, 30 OCT 2025 to 27 NOV 2025

EC-2, 30 OCT 2025 to 27 NOV 2025