

|               |         |          |       |
|---------------|---------|----------|-------|
| LOC/DME I-SMR | APP CRS | Rwy Ldg  | 10502 |
| 111.3         | 032°    | TDZE     | 3680  |
| Chan 50       |         | Apt Elev | 3680  |

ILS or LOC RWY 3


GREAT FALLS INTL (GTF)

DME required.


ALSF-2

MISSED APPROACH: Climb to 5000 then climbing right turn to 8300 direct GTF VORTAC then on GTF VORTAC R-209 to FRYMN/I-SMR 16.9 DME and hold.

|                     |                                      |                                  |                        |
|---------------------|--------------------------------------|----------------------------------|------------------------|
| ATIS<br>126.6 269.0 | GREAT FALLS APP CON<br>128.6 379.175 | GREAT FALLS TOWER<br>118.7 282.2 | GND CON<br>121.7 348.6 |
|---------------------|--------------------------------------|----------------------------------|------------------------|

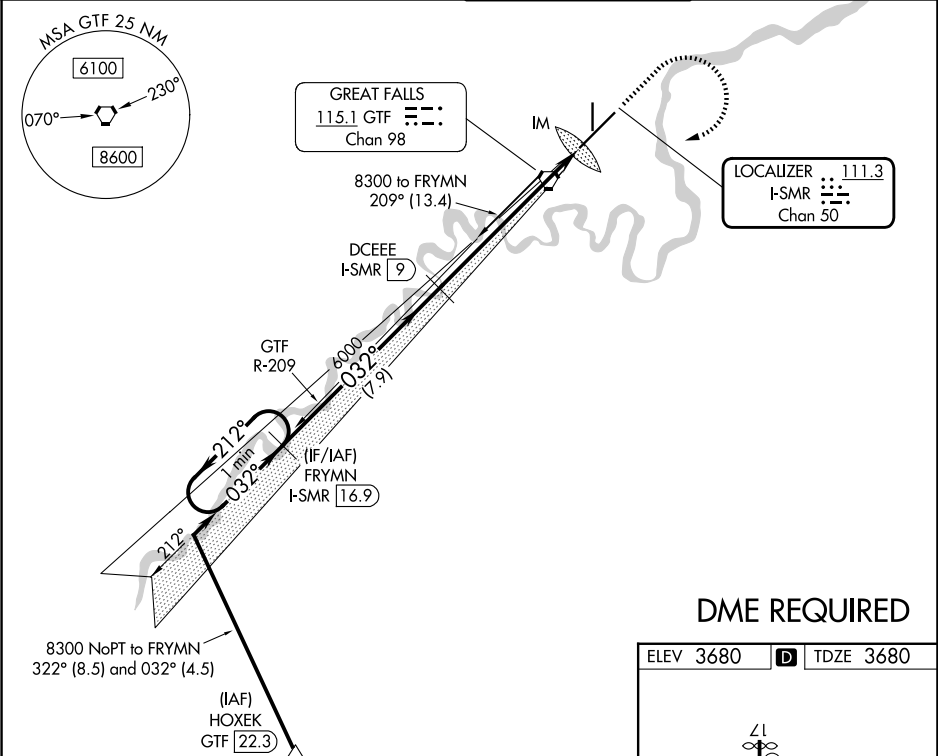

DME REQUIRED

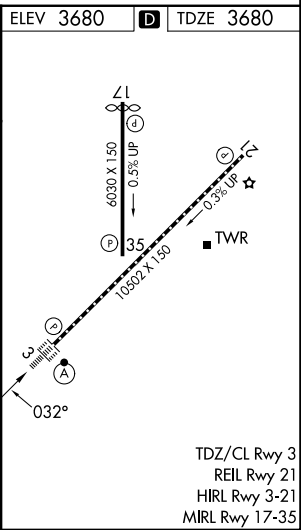

|                                                                 |                     |                  |                      |                                             |                      |                  |
|-----------------------------------------------------------------|---------------------|------------------|----------------------|---------------------------------------------|----------------------|------------------|
| VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70). |                     | 5000             | 8300                 | GTF                                         | GTF R-209            | FRYMN I-SMR 16.9 |
| One Minute Holding Pattern                                      |                     | FRYMN I-SMR 16.9 | DCEEE I-SMR 9        | Use I-SMR DME when on the localizer course. |                      |                  |
| 8300 ← 212° → 032° → 032°                                       |                     | 6000             | *I-SMR 3.2           | I-SMR 1.9                                   | IM                   |                  |
| GS 3.00° TCH 54                                                 |                     | 6000             | *LOC only            | 1.1                                         | 0.1                  |                  |
|                                                                 |                     | 7.9 NM           |                      | 5.9 NM                                      |                      |                  |
| CATEGORY                                                        | A                   | B                | C                    | D                                           |                      |                  |
| S-ILS 3                                                         | 3880/18             |                  | 200 (200-½)          |                                             |                      |                  |
| S- LOC 3                                                        | 4140/24 460 (500-½) |                  | 4140/45 460 (500-¾)  |                                             |                      |                  |
| CIRCLING                                                        | 4140-1 460 (500-1)  |                  | 4340-1¾ 660 (700-1¾) |                                             | 4420-2¼ 740 (800-2¼) |                  |