

WAAS CH 69629 W32A	APP CRS 317°	Rwy Idg TDZE Apt Elev	6236 2605 2613
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32

PECOS MUNI (P/E/Q)


RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using Wink altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Wink altimeter setting: increase LPV DA to 2900 feet, LNAV/VNAV DA to 2950 feet and all visibilities ¼ SM; increase all MDA 100 feet and visibility Cat C and LNAV Cat D ¼ SM. Circling Rwy 9, 27 NA at night.

MISSED APPROACH: Climb to 4600 direct WALOM and hold.

AWOS-3 118.175	ALBUQUERQUE CENTER 135.875 292.15	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

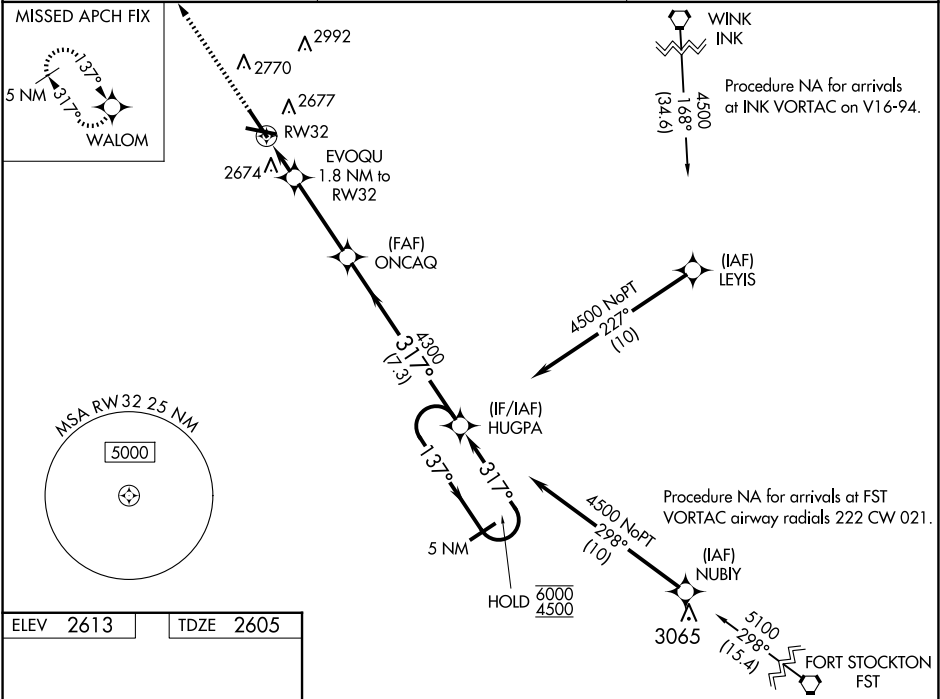

ELEV 2613 TDZE 2605

MIRL Rwy 9-27 and 14-32 0

4600	WALOM	ONCAQ	HUGPA	5 NM Holding Pattern	
↑	✧	EVOQU 1.8 NM to RW32	4300	137° → 6000 ← 317° 4500	
		0.9 NM to RW32	3200	GP 3.00° TCH 40	
		0.9	0.9 NM	3.4 NM	7.3 NM
CATEGORY	A	B	C	D	
LPV DA	2805-¾ 200 (200-¾)				
LNAV/VNAV DA	2855-¾ 250 (300-¾)				
LNAV MDA	2940-1 335 (400-1)				
CIRCLING	3060-1 447 (500-1)	3140-1 527 (600-1)	3360-2¼ 747 (800-2¼)	3360-2½ 747 (800-2½)	

SC-3, 30 OCT 2025 to 27 NOV 2025

SC-3, 30 OCT 2025 to 27 NOV 2025