


WAAS CH 62802 W32A	APP CRS 320°	Rwy Ldg 7278 TDZE 793 Apt Elev 796
--	------------------------	---


RNAV (GPS) Y RWY 32

INDIANAPOLIS INTL (IND)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. **RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSR AS	MISSED APPROACH: Climb to 3000 direct KEADY and hold.	
D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 251.1	GND CON 121.9	CLNC DEL 128.75 251.1	CPDLC

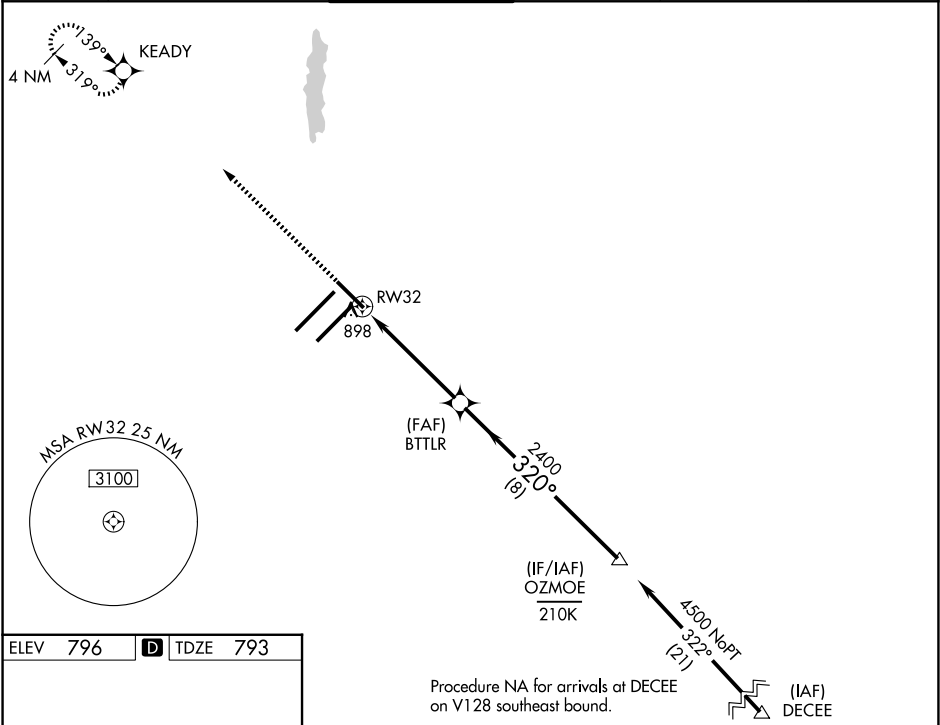

ELEV 796	D	TDZE 793
-----------------	----------	-----------------

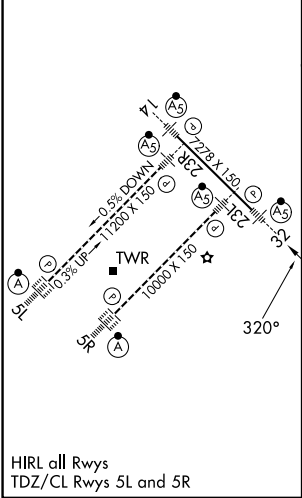

3000 ↑		KEADY ✦		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).		OZMOE 4500			
*LNAV only		*1 NM to RW32		BTTLR 2400		GP 3.00° TCH 53			
RW32 898		1 NM 3.9 NM 8 NM		2400 320°					
CATEGORY		A		B		C		D	
LPV DA				** 993/24		200 (200-½)			
LNAV/ VNAV DA				1069/24		276 (300-½)			
LNAV MDA		1160/24		367 (400-½)		1160/35		367 (400-¾)	
CIRCLING		1420-1		624 (700-1)		1420-1¾ 624 (700-1¾)		1560-2½ 764 (800-2½)	