

JACKSONVILLE, FLORIDA

RNAV (GPS) Z RWY 28

WAAS CH 46924 W28A	APCH CRS 276°	Rwy ldg TDZE Arpt Elev	9003 13 23
--------------------------	------------------	------------------------------	------------------

(USN)

JACKSONVILLE NAS (TOWERS FLD) (KNIP)


RNP APCH


▼ * When ALS inop, increase CAT BCD to 7/8 mile.
** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1 1/8 miles.

SALSF MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct ITEGE, track 156° to MADEN and hold.

ATIS 124.35 290.425	APP CON/DEP CON 127.775 377.075	TOWER 125.15 (CTAF) 340.2	GND CON 128.6 336.4	CLNC DEL 134.775 0 353.675	ASR/PAR
------------------------	------------------------------------	------------------------------	------------------------	-------------------------------	---------

For uncompensated
BARO-VNAV systems,
Procedure NA below
-15°C (5°F) and
above 54°C (129°F).

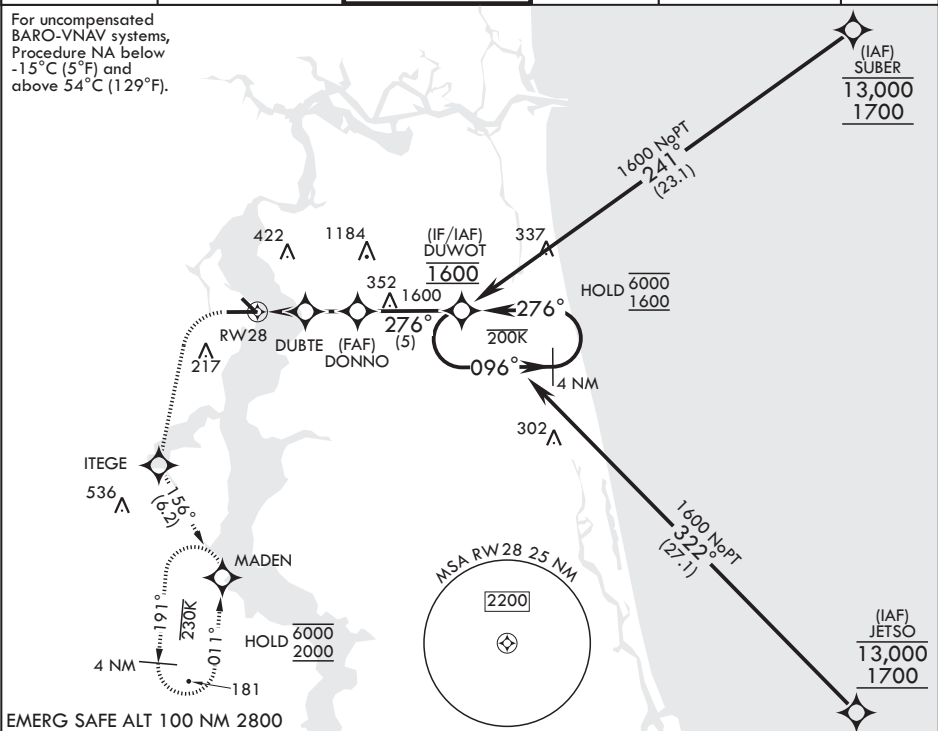

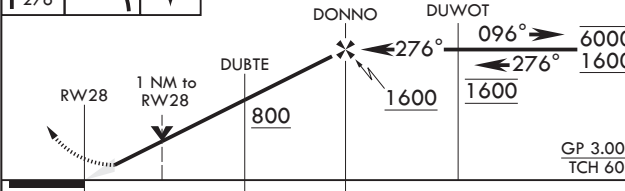600 crs 276°	2000	ITEGE	ELEV 23	See Supp for declared dist.	TDZE 13
					
CATEGORY	A	B	C	D	
LPV DA	213-¾	200	(200-¾)		
LNAV/VNAV DA*	263-¾ 250 (300-¾)	274-¾ 261 (300-¾)	282-¾ 269 (300-¾)	293-¾ 280 (300-¾)	
LNAV MDA**	400-¾ 387 (400-¾)	400-¾ 387 (400-¾)	520-1½ 497 (500-1½)	760-2¼ 737 (800-2¼)	
CIRCLING	500-1 477 (500-1)				
HIRL Rwy 10-28					

JACKSONVILLE, FLORIDA

30°14'N - 81°41'W

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

Amdt 2 30OCT25

RNAV (GPS) Z RWY 28

SE-3, 30 OCT 2025 to 27 NOV 2025

SE-3, 30 OCT 2025 to 27 NOV 2025