

WAAS CH 53528 W18A	APP CRS 180°	Rwy Idg 5199 TDZE 430 Apt Elev 430
--	------------------------	---


RNAV (GPS) RWY 18

LAWRENCEVILLE-VINCENNES INTL (LWV)


- T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F).
A DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Carmel altimeter setting. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA 656 feet; increase LNAV/VNAV DA to 902 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM; and Circling visibility Cat D ¼ SM. Circling to Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2600 direct
VOCUT and hold.


ASOS 118.0	EVANSVILLE APP CON ★ 125.6 343.7	UNICOM 122.8 (CTAF) 0
----------------------	--	---------------------------------

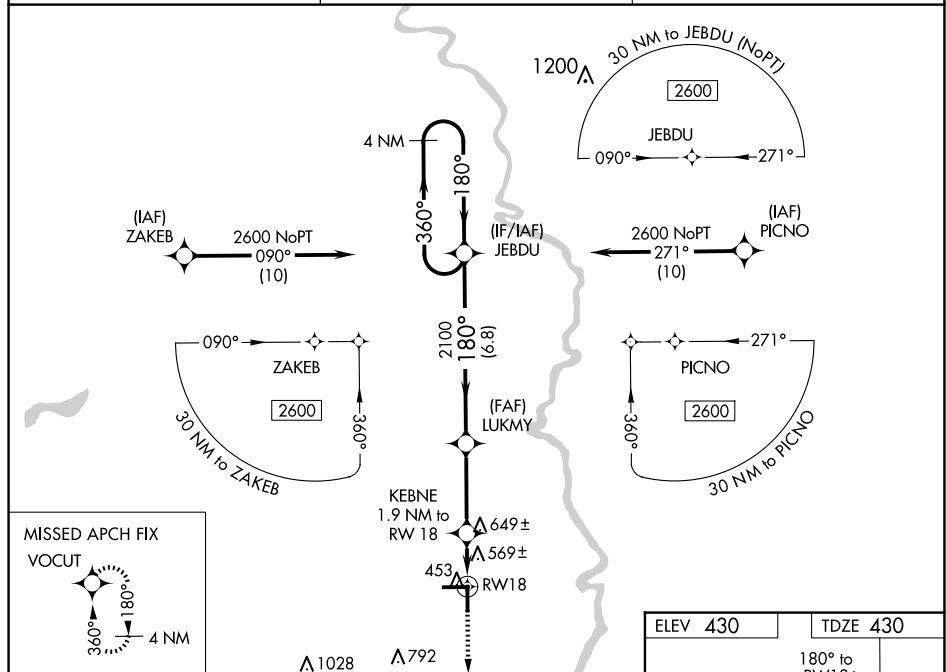

MISSED APCH FIX
VOCUT

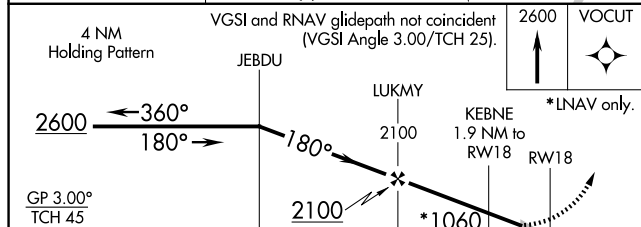

		6.8 NM		3.2 NM		1.9 NM	
CATEGORY	A	B	C	D			
LPV DA	630- $\frac{3}{4}$		200 (200- $\frac{3}{4}$)				
LNAV/ VNAV	DA	876-1 $\frac{1}{2}$		446 (500-1 $\frac{1}{2}$)			
LNAV MDA	940-1	510 (600-1)		940-1 $\frac{3}{8}$		510 (600-1 $\frac{3}{8}$)	
CIRCLING	940-1	510 (600-1)		940-1 $\frac{1}{2}$ 510 (600-1 $\frac{1}{2}$)		1160-2 $\frac{1}{4}$ 730 (800-2 $\frac{1}{4}$)	

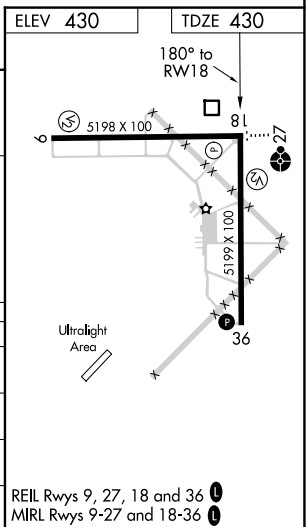

RNAV (GPS) RWY 18