

LOC I-EXW	APP CRS	Rwy Ldg	7815
108.3	259°	TDZE	548
		Apt Elev	565

ILS or LOC RWY 26

EASTERN WV RGNL/SHEPHERD FLD (MRB)

▼

▲NA


For inop ALS, increase S-ILS 26 Cat E visibility to ¾ SM and S-LOC 26 Cat E visibility to 1¼ SM.

MALSR

MISSED APPROACH:

Climb to 1100 then climbing left turn to 3300 direct MRB VORTAC and hold, continue climb-in-hold to 3300.

ASOS	POTOMAC APP CON	MARTINSBURG TOWER ★	GND CON	CLNC DEL	CLNC DEL
119.925	126.825 239.025	124.3 (CTAF) 233.7	121.8 257.65	121.8 257.65	132.075 269.075 (When twr closed)

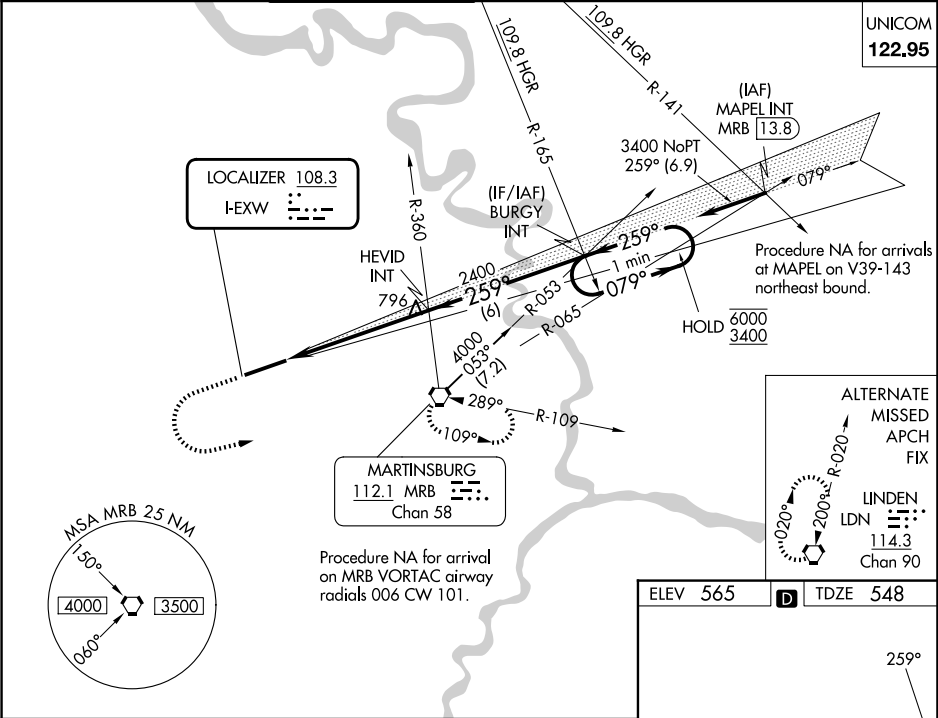

1100

3300

MRB

HEVID INT

BURGY INT

One Minute Holding Pattern

2400

259°

079°

6000

3400

GS 3.00°

TCH 52

5.7 NM

6 NM

CATEGORY	A	B	C	D	E
S-ILS 26	748-½ 200 (200-½)				
S-LOC 26	980-½ 432 (500-½)		980-¾ 432 (500-¾)		
CIRCLING	1100-1 535 (600-1)	1240-1 675 (700-1)	1240-2 675 (700-2)	1320-2½ 755 (800-2½)	2180-3 1615 (1700-3)

TWR

8815 X 150

622

259°

REIL Rwy 8

HIRL Rwy 8-26

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sed	5:42	3:48	2:51	2:17	1:54