

VORTAC MRB

112.1

Chan 58

APP CRS

290°

Rwy Ldg TDZE

N/A

Apt Elev

565

EASTERN WV RGNL/SHEPHERD FLD (MRB)


VOR-A

RADAR required for procedure entry at HARPP.

When local altimeter setting not received, use HGR altimeter setting:
increase all MDAs 80 feet and Circling visibility Cts C/D ¼ SM.

MISSED APPROACH: Climbing left turn to 3000 direct MRB VORTAC and hold, continue climb in hold to 3000.

ASOS	POTOMAC APP CON	MARTINSBURG TOWER ★	GND CON	CLNC DEL	CLNC DEL
119.925	126.825 239.025	124.3 (CTAF) 233.7	121.8 257.65	121.8 257.65	132.075 269.075 (When twr closed)

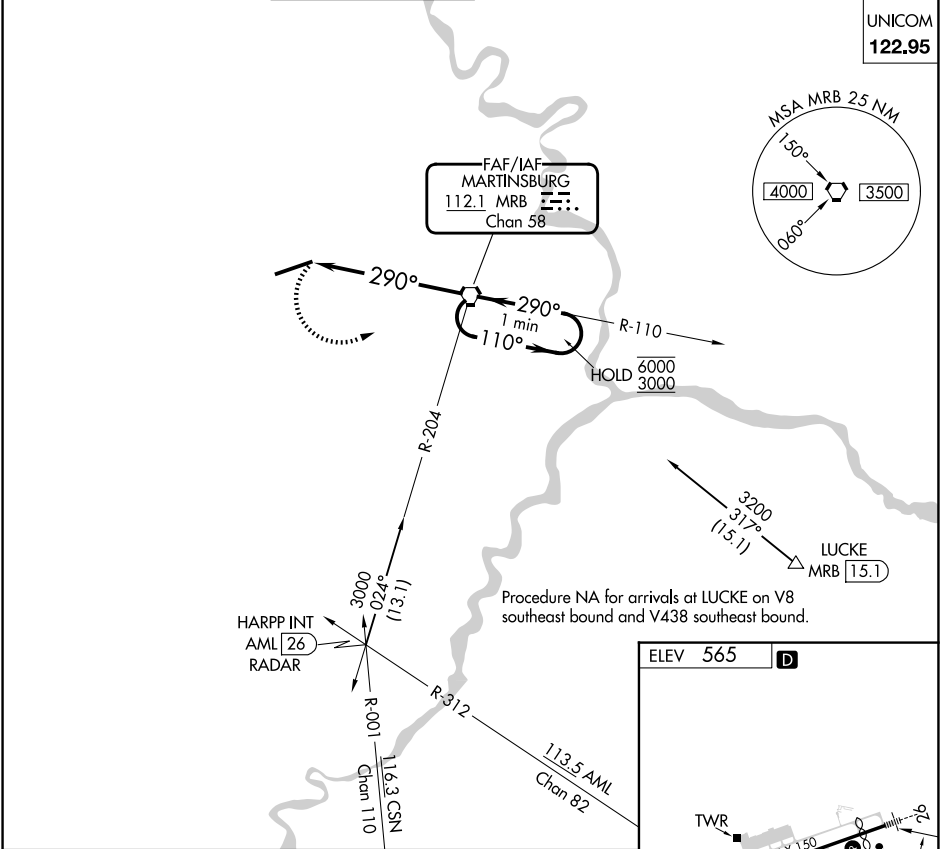

3000

MRB

MRB VORTAC

One Minute Holding Pattern

110°

290°

6000

3000

5.7 NM

TWR

8815 X 150

622

290°

REIL Rwy 8

HIRL Rwy 8-26

CATEGORY	A	B	C	D	E	FAF to MAP 5.7 NM				
CIRCLING	1120-1 555 (600-1)	1240-1 675 (700-1)	1240-2 675 (700-2)	1320-2½ 755 (800-2½)	2180-3 1615 (1700-3)	Knots	60	90	120	150
						Min:Sec	5:42	3:48	2:51	2:17
									1:54	