

WAAS CH 60901 W09B	APP CRS 094°	Rwy Ldg 10181 TDZE 32 Apt Elev 33
--	------------------------	--

RNAV (GPS) RWY 9R
MELBOURNE ORLANDO INTL (MLB)

RNP APCH - GPS.



T For uncompensated Baro-VNAV systems, LNAV/VNAV NA
A below 2°C or above 54°C.

MALSR



MISSED APPROACH: Climb to 2000 direct ZUVOM and hold.

ATIS 132.55	ORLANDO APP CON 126.025 281.425	MELBOURNE TOWER ★ 118.2 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

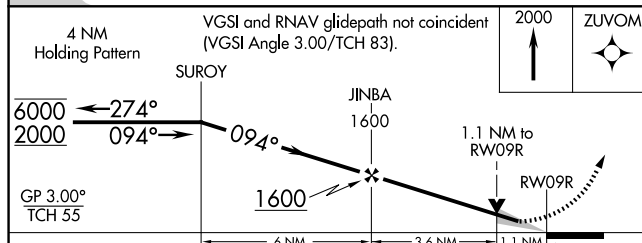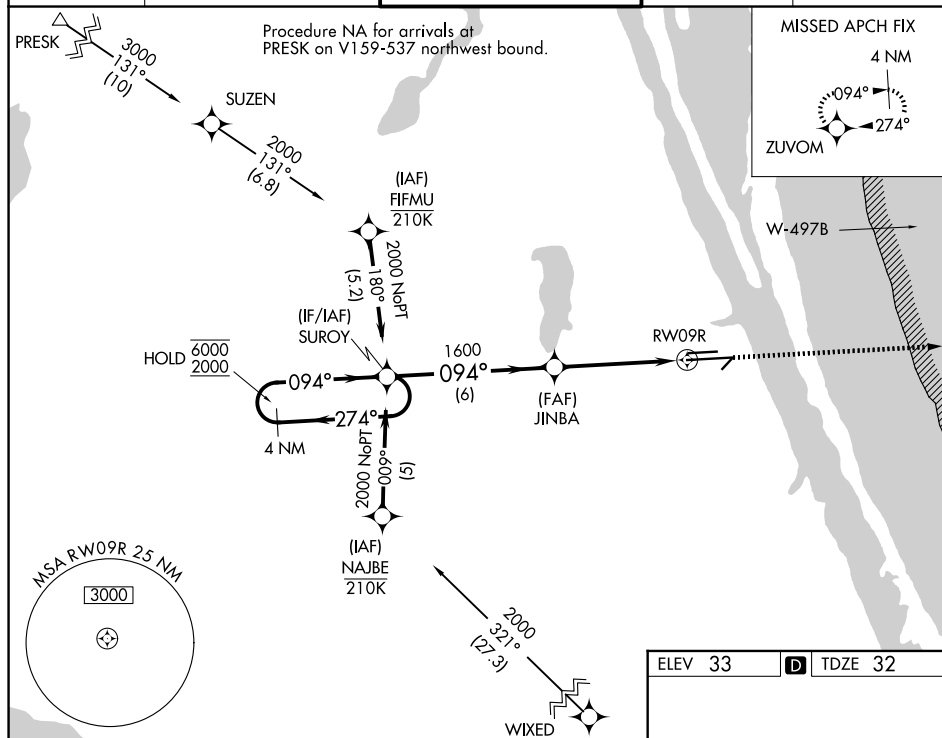

CATEGORY	A	B	C	D
LPV DA	232/18 200 (200-1/2)			
LNAV/ VNAV DA	427/35 395 (400-5%)			
LNAV MDA	480/24 448 (500-1/2)		480/45 448 (500-7%)	
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-13/4 647 (700-13/4)	880-23/4 847 (900-23/4)

