

LOC/DME I-MYO	APP CRS	Rwy Idg	9000
111.35	360°	TDZE	335
Chan 50 (Y)		Apt Elev	341

ILS RWY 36R (CAT II & III)


MEMPHIS INTL (MEM)

Simultaneous approach authorized with Rwy 36L.
DME or RADAR required.


ALSF-2

MISSED APPROACH: Climb to 1000 then climbing right turn to 5000 via heading 070° and MEM VORTAC R-040 to OROCU INT/MEM VORTAC 15 DME and hold, continue climb-in-hold to 5000.

MEMPHIS APP CON	MEMPHIS TOWER	GND CON	CLNC DEL
(Rwy 9-27) 119.1 291.6 (176°-355°)	(Rwy 9-27) 118.3 257.8	(Rwy 9-27) 121.0 379.2	
(Rwys 18C-36C, 18L-36R) 125.8 338.3 (356°-175°)	(Rwys 18C-36C, 18L-36R) 119.7 257.8	(Rwys 18C-36C, 18L-36R) 121.9 379.2	125.2
	(Rwy 18R-36L) 128.425 257.8	(Rwy 18R-36L) 121.65 379.2	

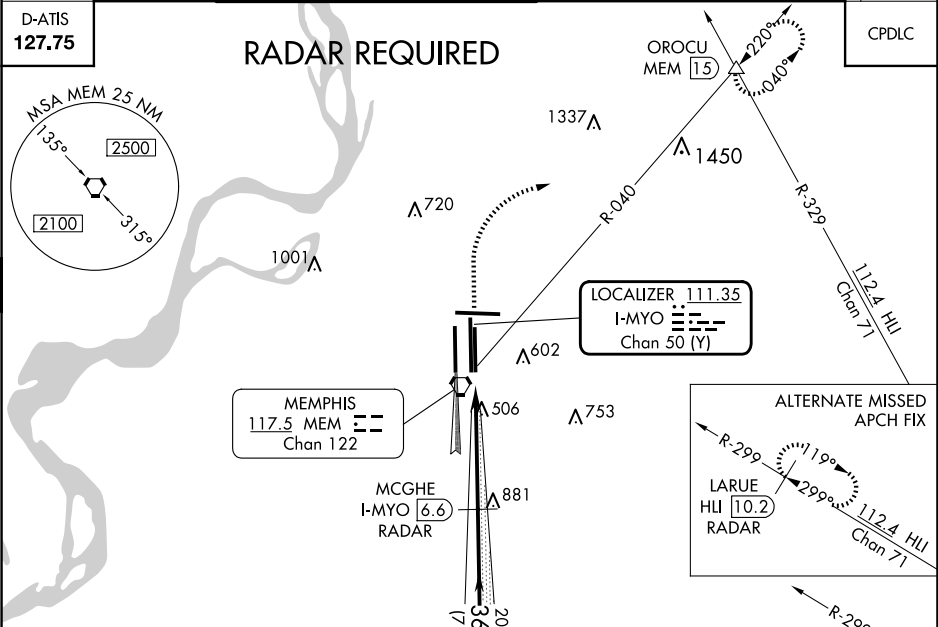

ELEV 341	TDZE 335
----------	----------



1000	5000	MEM R-040	OROCU	MCGHE I-MYO 6.6 RADAR	HADAN I-MYO 14 RADAR
hdg 070°				2000	3000
VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 69).					
GS 3.00% TCH 58					
CATEGORY A B C D					
S-ILS 36R CAT II RA 109/12 100 DA 435					
S-ILS 36R CAT IIIa RVR07					
S-ILS 36R CAT IIIb RVR03					
S-ILS 36R CAT IIIc NA					

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED