

25219


RNAV (GPS) RWY 30

MIAMI-OPA LOCKA EXEC (OPF)

T Baro-VNAV and VDP NA when using Miami Intl altimeter setting.
A Rwy 30 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7°C or above 54°C. When local altimeter setting not received, use Miami Intl altimeter setting: increase LPV DA to 276 feet and all visibilities $\frac{1}{8}$ SM; increase LNAV/VNAV DA to 438 feet and all visibilities $\frac{1}{8}$ SM; increase all MDAs 20 feet and LNAV visibility Cat C/D $\frac{1}{8}$ SM and Circling visibility Cat D $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 800 then climbing right turn to 3000 direct HOWHS and hold, continue climb-in-hold to 3000.

ATIS 125.9	MIAMI APP CON 128.6 306.975	OPA LOCKA TOWER ★ 134.675 (CTAF) 0	GND CON 120.025	CLNC DEL 119.2	GCO 119.45
---------------	--------------------------------	---------------------------------------	--------------------	-------------------	---------------

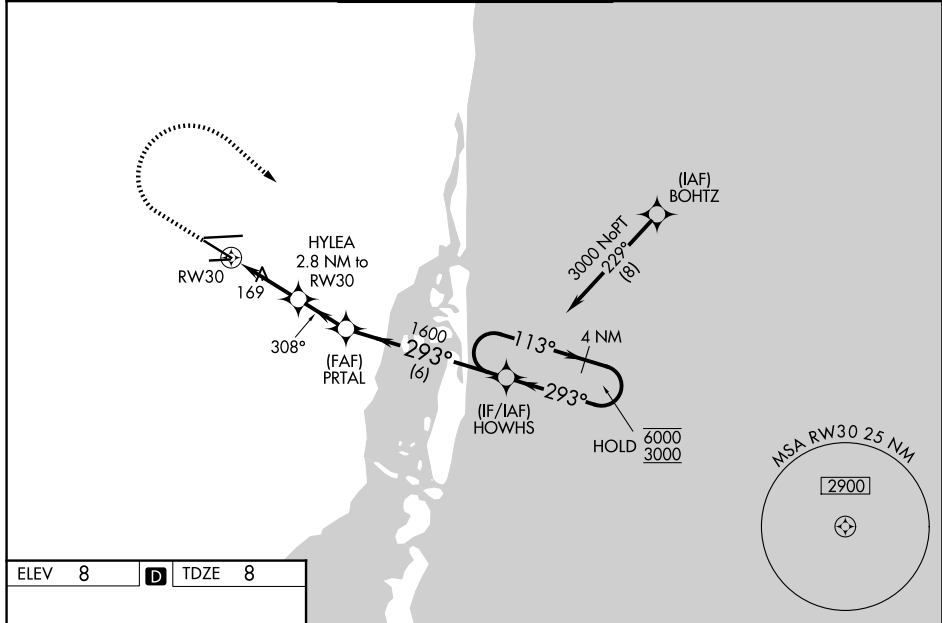

MIRL Rwy 9R-27L
HIRL Rwys 9L-27R and 12-30

CATEGORY	A	B	C	D
LPV DA	258- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)		
LNAY/ VNAV DA	420-1 $\frac{1}{8}$	412 (500-1 $\frac{1}{8}$)		
LNAY MDA	420-1	412 (500-1)	420-1 $\frac{1}{8}$	412 (500-1 $\frac{1}{8}$)
CIRCLING	480-1 472 (500-1)	520-1 512 (600-1)	620-1 $\frac{3}{4}$ 612 (700-1 $\frac{3}{4}$)	740-2 $\frac{1}{4}$ 732 (800-2 $\frac{1}{4}$)

MIAMI-OPA LOCKA EXEC (OPF)
RNAV (GPS) RWY 30

SE-3, 30 OCT 2025 to 27 NOV 2025