


MIAMI INTL (MIA)  
MIAMI, FLORIDA

## ALTNN TWO DEPARTURE(RNAV)

MIAMI DEP CON  
119.45 290.325  
D-ATIS  
133.675  
CLNC DEL  
135.35  
CPDLC  
GND CON  
(Rwys 8L/R, 12, 2)  
121.8 348.6  
(Rwys 9, 27, 30)  
127.5 348.6  
MIAMI TOWER  
118.3 256.9

|                              |
|------------------------------|
| RNAV 1 - DME/DME/IRU or GPS. |
| RADAR required.              |

**TOP ALTITUDE:**  
5000



## TAKEOFF MINIMUMS

Rwy 8L: Standard with minimum climb of 500'/NM to 520, then minimum climb of 215 to 1400.

Rwy 8R: Standard with minimum climb of 500'/NM to 520, then minimum climb of 235 to 1400.


Rwy 9: Standard with minimum climb of 500'/NM to 520, then minimum climb of 240 to 1400.

Rwy 12: Standard with minimum climb of 500'/NM to 520, then minimum climb of 230 to 1400.

Rwys 26L/R, 27, 30: Standard with minimum climb of 500'/NM to 520.

NOTE: Jet aircraft only.

NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.

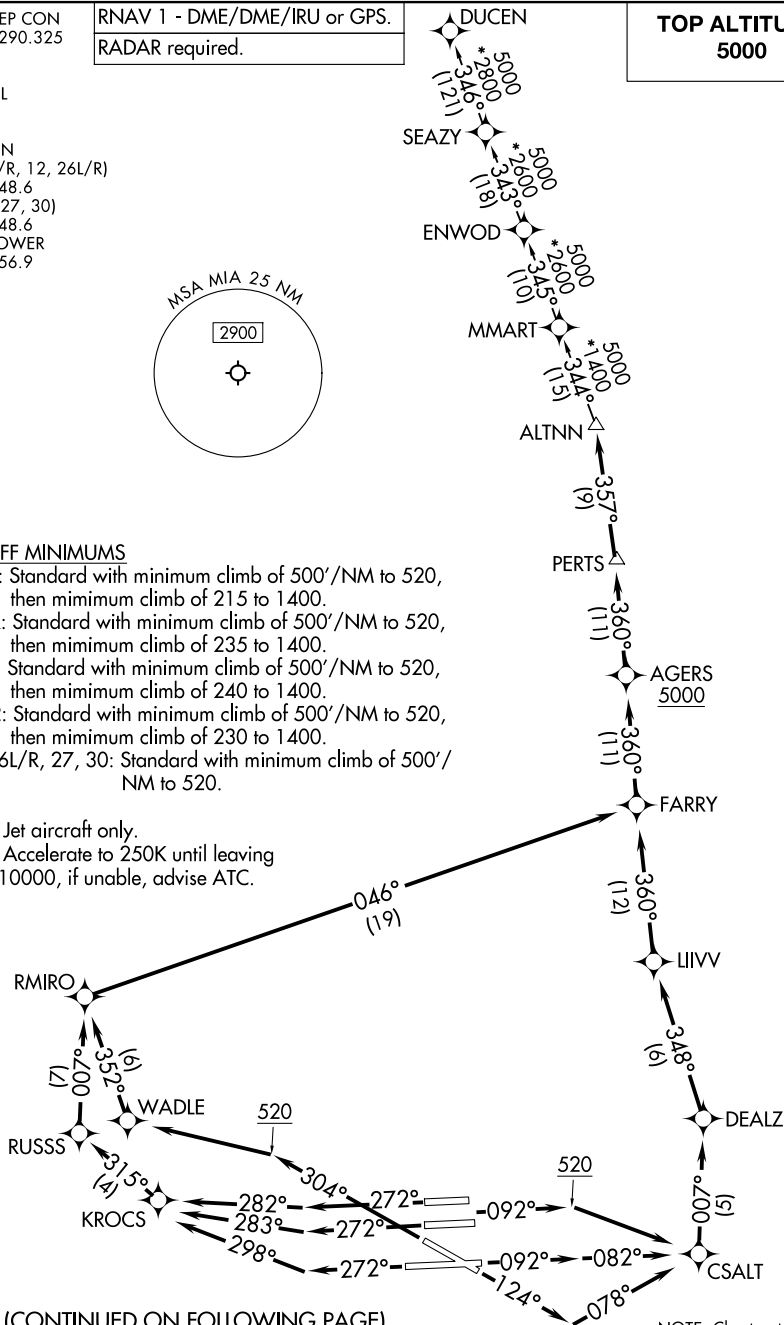

NOTE: Chart not to scale.

## ALTNN TWO DEPARTURE (RNAV)

(ALTNN2.ALTNN) 21MAR24

MIAMI, FLORIDA  
MIAMI INTL (MIA)

SE-3, 30 OCT 2025 to 27 NOV 2025