

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>42600</b><br><b>W04A</b> | APP CRS<br><b>043°</b> | Rwy Idg <b>5764</b><br>TDZE <b>2634</b><br>Apt Elev <b>2634</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|


RNAV (GPS) RWY 4  
FRANK WILEY FLD (MLS)

RNP APCH-GPS.

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Glendive altimeter setting: increase LPV and LNAV/VNAV DA to 3051 and all visibilities ½ SM. Increase all MDA 180 feet and LNAV Cat C and D visibilities ½ SM and Circling Cat C and D visibilities ½ SM. Baro-VNAV and VDP NA when using Glendive altimeter setting.

MISSED APPROACH: Climb to 6000 direct AXUPE and hold, continue climb-in-hold to 6000.

|                        |                                         |                                 |
|------------------------|-----------------------------------------|---------------------------------|
| ASOS<br><b>135.575</b> | SALT LAKE CENTER<br><b>126.85 305.2</b> | UNICOM<br><b>123.0 (CTAF) 1</b> |
|------------------------|-----------------------------------------|---------------------------------|

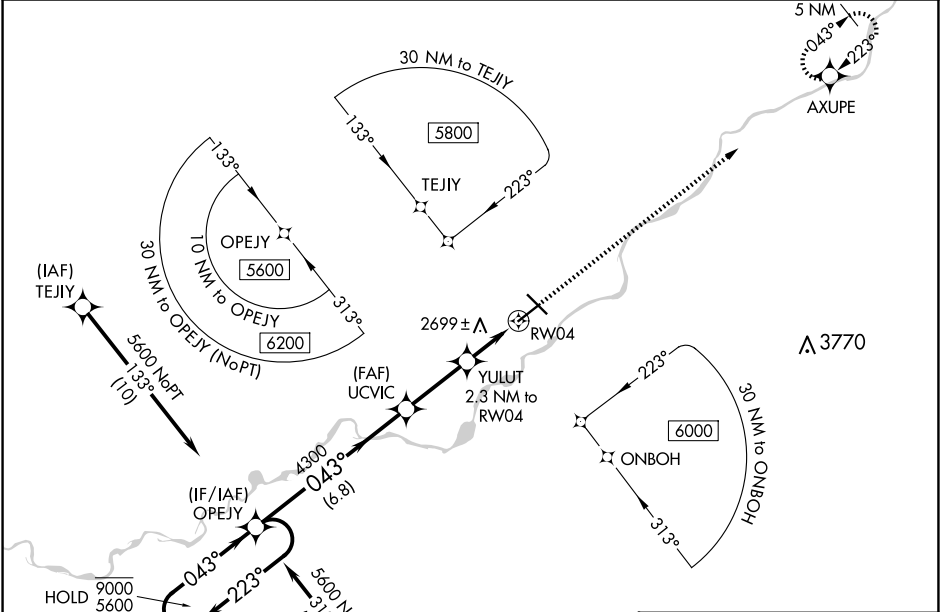

|           |           |
|-----------|-----------|
| ELEV 2634 | TDZE 2634 |
|-----------|-----------|

5 NM Holding Pattern

9000  
5600

GP 3.00°  
TCH 40

043°

043°

043°

4300

3400

6.8 NM

2.8 NM

1.2 NM

1.2 NM


AXUPE

6000

YULUT 2.3 NM to RW04

1.2 NM to RW04

| CATEGORY     | A                     | B                     | C                       | D                       |
|--------------|-----------------------|-----------------------|-------------------------|-------------------------|
| LPV DA       | 2884-1 250 (300-1)    |                       |                         |                         |
| LNAV/VNAV DA | 2884-1 250 (300-1)    |                       |                         |                         |
| LNAV MDA     | 3040-1                | 406 (500-1)           | 3040-1½                 | 406 (500-1½)            |
| CIRCLING     | 3060-1<br>426 (500-1) | 3100-1<br>466 (500-1) | 3160-1½<br>526 (600-1½) | 3320-2¼<br>686 (700-2¼) |

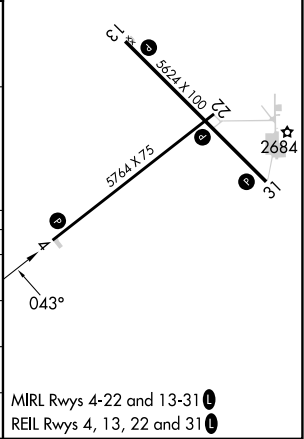

NW-1, 30 OCT 2025 to 27 NOV 2025

NW-1, 30 OCT 2025 to 27 NOV 2025