



WAAS CH 99322 W19A	APP CRS 191°	Rwy Ldg TDZE 672 Apt Elev 729
--	------------------------	---

RNAV (GPS) RWY 19R

GENERAL MITCHELL INTL (MKE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1½ mile. ** RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR AS	MISSED APPROACH: Climb to 2000 then climbing right turn to 2800 direct BAE VOR/DME and hold.
--	---	--

D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125	CLNC DEL 120.8	CPDLC
------------------------	---	--	---------------------------------	--------------------------	-------

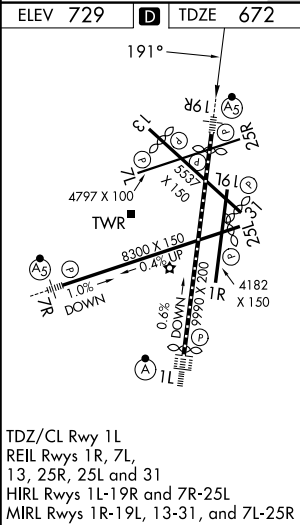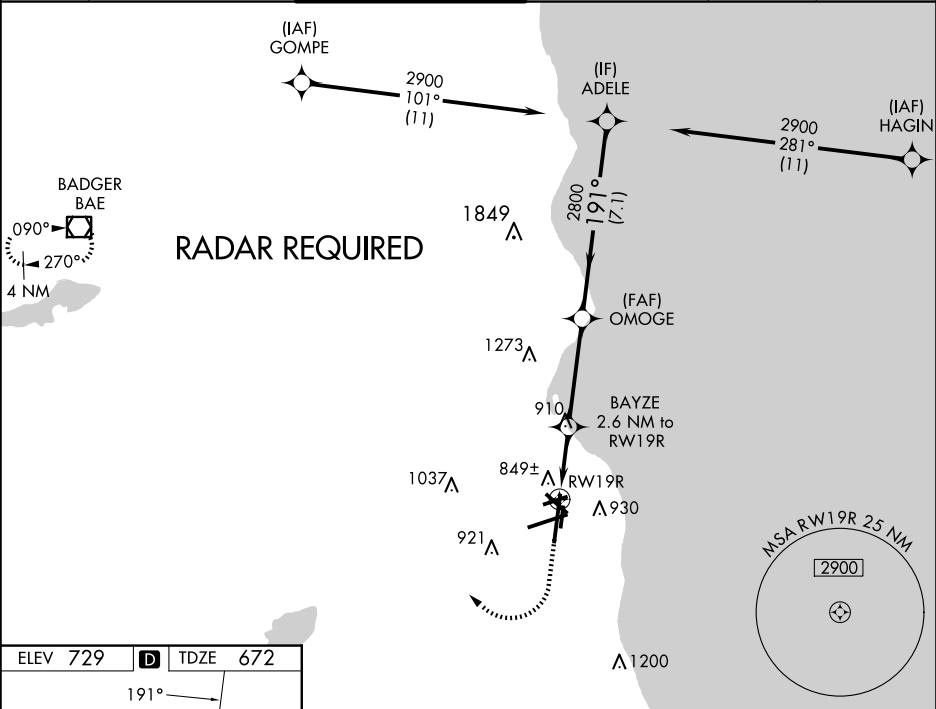

2000 2800 BAE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).			
*LNAV only 1.1 NM to RW19R 2.6 NM to RW19R	OMOG 2800 191° 2900	ADELE 2900		
RW19R 1.1 NM 1.5 NM 3.9 NM 7.1 NM	*1540	GP 3.00° TCH 54		
CATEGORY	A	B	C	D
LPV DA **	872/24 200 (200-½)			
LNAV/ VNAV	1031/40 359 (400-¾)			
LNAV MDA	1100/24 428 (400-½)		1100/40 428 (400-¾)	
CIRCLING	1240-1 511 (600-1)		1240-1½ 511 (600-1½)	1360-2 631 (700-2)

EC-3, 30 OCT 2025 to 27 NOV 2025

EC-3, 30 OCT 2025 to 27 NOV 2025