


D-ATIS
126.4
CLNC DEL
120.8
CPDLC
GND CON
121.8 263.125
MILWAUKEE DEP CON
135.875 317.725 (SE)
125.35 307.0 (NW)

TOP ALTITUDE:
ASSIGNED BY ATC




TAKEOFF MINIMUMS

Rwys 1L/R, 7L, 13, 19L/R, 25L/R: Standard.
Rwy 7R: 300-1½ or standard with minimum climb of 290' per NM to 1100.
Rwy 31: 300-1½ or standard with minimum climb of 255' per NM to 1000.

- NOTE: RNAV 1.
NOTE: GPS or DME/DME/IRU required.
NOTE: RADAR required.
NOTE: Turbojet aircraft maintain 250K until advised by ATC.
NOTE: Notify ATC if unable to comply with crossing restrictions.

NOTE: Chart not to scale.

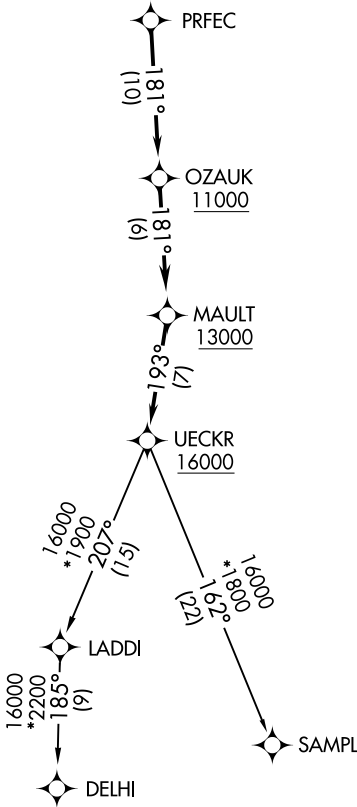

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R, 7L/R, 13, 19L/R, 25L/R, 31: Climb on assigned heading for RADAR vectors to PRFEC, thence....
....on track 181° to cross OZAUk at or above 11000, then on track 181° to cross MAULT at or above 13000, then on track 193° to cross UECKR at or above 16000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.
DELHI TRANSITION (UECKR6.DELHI)
SAMPL TRANSITION (UECKR6.SAMPL)