

WAAS CH 50125 W12A	APP CRS 121°	Rwy Ldg 10000 TDZE 842 Apt Elev 842
--	------------------------	--

RNAV (GPS) Z RWY 12R


MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 12L. DME/DME RNP-0.3 NA. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV Cat E visibility to 1½ SM, and increase LNAV Cat C/D/E visibility to RVR 5500. LNAV procedure NA during simultaneous operations.


ALSIF-2

MISSED APPROACH:
Climb to 1300 then
climbing right turn to
3000 direct FGT
VORTAC and hold.

ATIS 135.35 239.275	MINNEAPOLIS APP CON 118.725 335.65 (35) 119.3 335.65 (12L-30R, 4-22, 17) 126.95 335.65 (12R-30L)	MINNEAPOLIS TOWER 123.675 273.55 (17-35) 123.95 273.55 (12L-30R) 126.7 273.55 (12R-30L, 4-22)	GND CON 121.8 348.6 (N) 121.9 348.6 (S) 127.925 348.6 (W)
-------------------------------	--	---	---

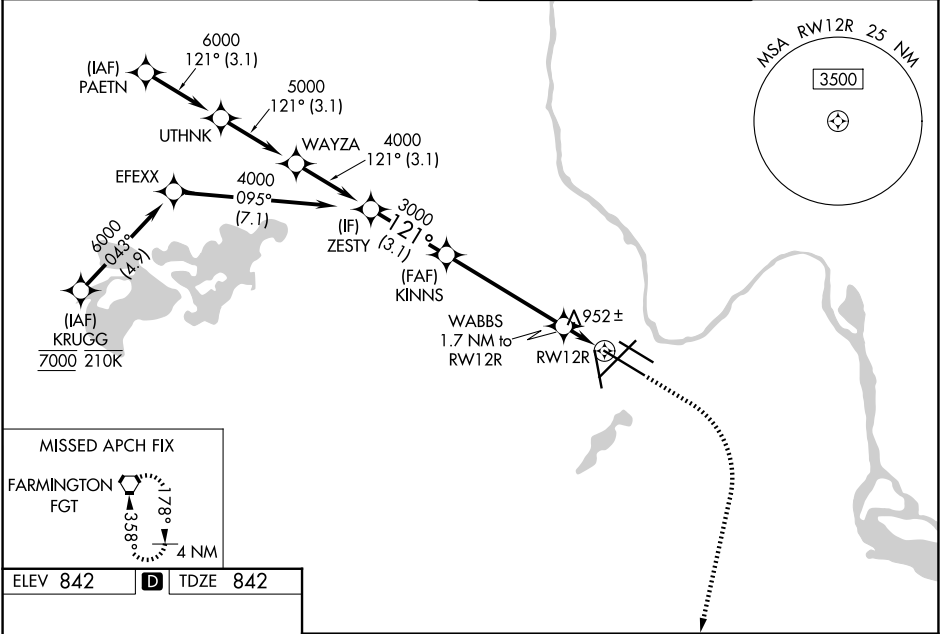

ELEV 842	D	TDZE 842
----------	----------	----------

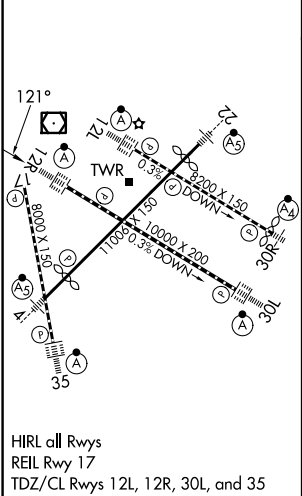

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).					
ZESTY		KINNS	WABBS 1.7 NM to RW12R	1300 3000	FGT
4000		3000	*LNAV only		
GP 3.00° TCH 50		*1420		*1 NM to RW12R	
3.1 NM		4.9 NM		0.7 NM	
1 NM		1 NM		RW12R	
CATEGORY	A	B	C	D	E
LPV DA	1042/18 200 (200-½)				
LNAV/ VNAV DA	1211/40 369 (400-¾)				
LNAV MDA	1220/24 378 (400-½)		1220/35 378 (400-⅝)		
CIRCLING	1360-1 518 (600-1)		1460-1¾ 618 (700-1¾)	1660-2¾ 818 (900-2¾)	1800-3 958 (1000-3)