

WAAS CH 86824 W27A	APP CRS 270°	Rwy Ldg 10002 TDZE 581 Apt Elev 590
--	------------------------	--

RNAV (GPS) RWY 27
QUAD CITIES INTL (MLI)

T Circling to Rwy 5 NA at night. Baro-VNAV NA when using Davenport altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Davenport altimeter setting; increase LPV DA to 828 feet and LNAV/VNAV DA to 1233 feet and LNAV/VNAV visibility all Cats ½ SM; increase all MDA 60 feet and LNAV visibility Cats C and D ¼ SM. Circling visibility Cats C and D ¼ SM. For inoperative ALS, increase LNAV/VNAV visibility all Cats to 2 SM, LNAV visibility Cats C and D to 1 ½ SM. When using Davenport altimeter setting increase LNAV visibility Cats C and D to 1 ½ SM.


****RVR 1800 authorized with use of FD or AP or HUD to DA.**

MALSR



MISSED APPROACH:
Climb to 2300 direct
TOCKY and hold.

ATIS 121.2	QUAD CITY APP CON ★ 125.95 257.8	QUAD CITY TOWER ★ 119.4(CTAF) 0 269.55	GND CON 121.9	CLNC DEL 124.05	UNICOM 122.95
---------------	-------------------------------------	---	------------------	--------------------	------------------

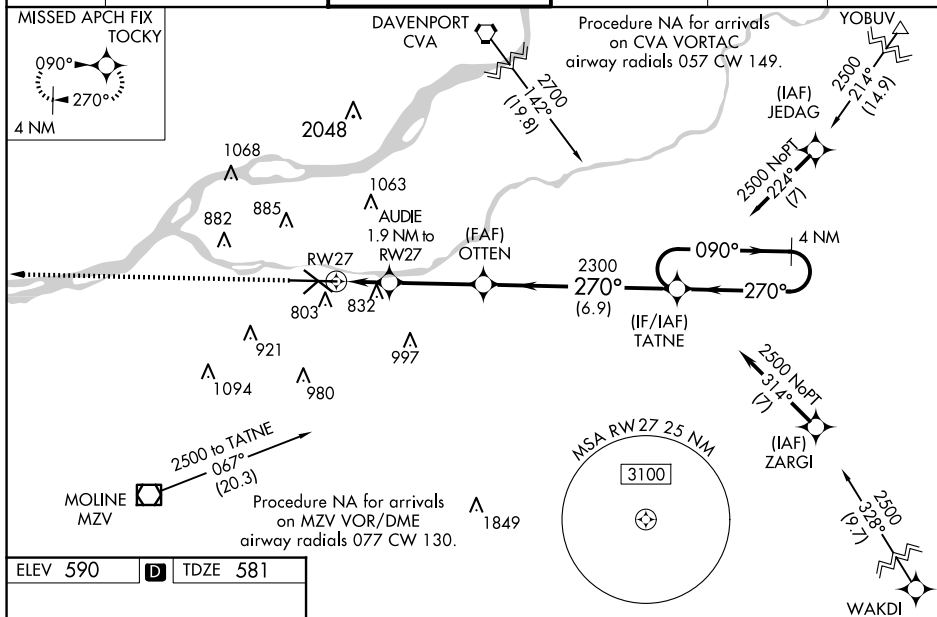

MIRL Rwy 5-23
REIL Rwys 13 and 31
HIRL Rwys 9-27 and 13-31

CATEGORY	A	B	C	D
LPV DA**	781/24 200 (200-1/2)			
LNAV/VNAV DA	1186-1 5/8 605 (600-1 5/8)			
LNAV MDA	1100/24 519 (600-1/2)		1100/55 519 (600-1)	
CIRCLING	1140-1 550 (600-1)	1200-1 610 (700-1)	1320-2 730 (800-2)	1420-2 3/4 830 (900-2 3/4)

MIRL Rwy 5-23
REIL Rwy 13 and 31 **L**
HIRL Rwy 9-27 and 13-31

MOLINE, ILLINOIS
Amdt 1E 09SEP21

41°27'N-90°30'W

QUAD CITIES INTL (MLI)
RNAV (GPS) RWY 27