

WAAS CH 61135 W36A	APP CRS 004°	Rwy Idg 4000 TDZE 547 Apt Elev 551
--	------------------------	---


RNAV (GPS) RWY 36
NORTHWEST ALABAMA RGNL (MST)

RNP APCH-GPS



⚠ Circling to Rwy 18 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Baro-VNAV and VDP NA when using Decatur altimeter setting. When local altimeter setting not received, use Decatur altimeter setting and increase LPV DA to 874, LNAV/VNAV DA to 1012 and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C/D visibility ¼ mile, and Circling Cats C/D visibility ½ mile.

MISSED APPROACH:
Climb to 3000 direct
TUBYO and hold.

ASOS 119.425	MEMPHIS CENTER 120.8 307.0	GCO 121.725	UNICOM 123.05 (CTAF) ①
------------------------	--------------------------------------	-----------------------	----------------------------------

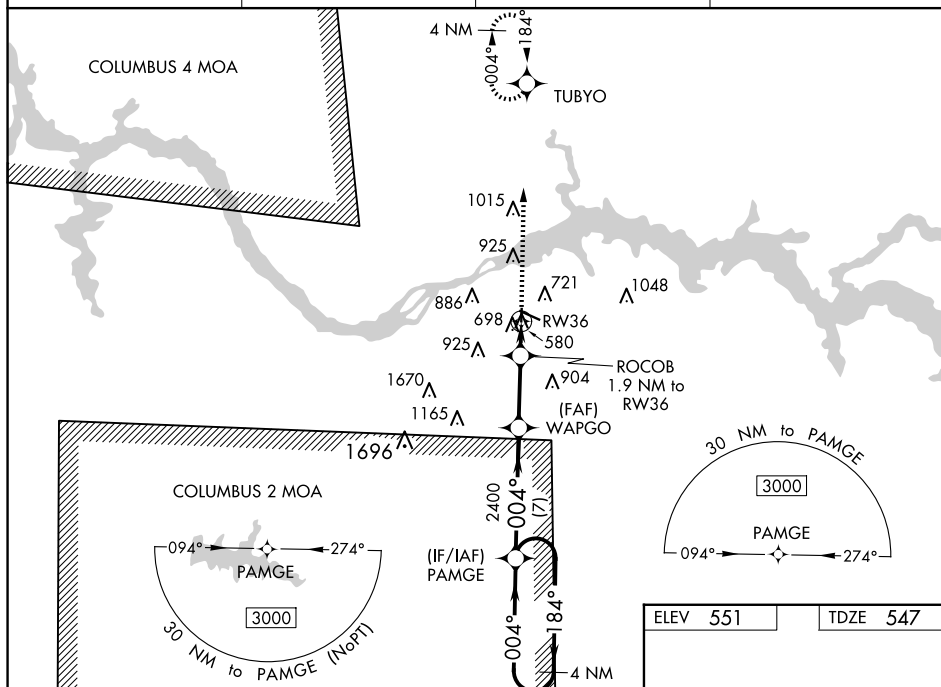

ELEV 551		TDZE 547
----------	--	----------

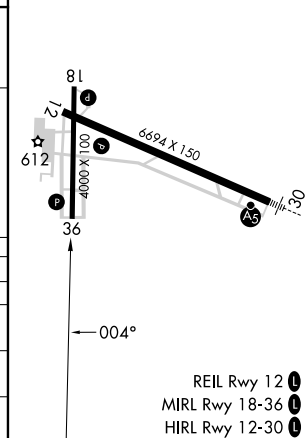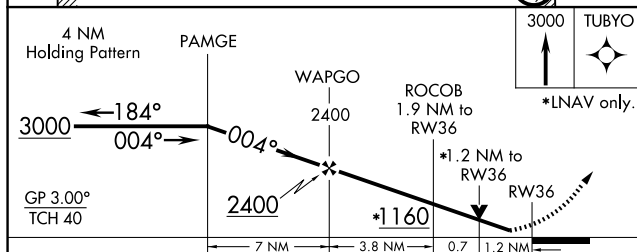

CATEGORY		A	B	C	D
LPV	DA	797-1		250 (300-1)	
LNAV/ VNAV	DA	935-1 $\frac{3}{8}$		388 (400-1 $\frac{3}{8}$)	
LNAV MDA		960-1 413 (500-1)		960-1 $\frac{1}{8}$ 413 (500-1 $\frac{1}{8}$)	
 CIRCLING		1040-1 489 (500-1)		1280-2 729 (800-2)	1280-2 $\frac{1}{4}$ 729 (800-2 $\frac{1}{4}$)