
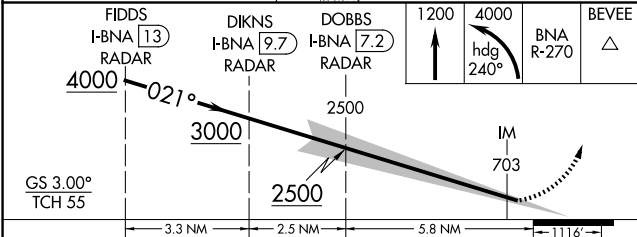


LOC/DME I-BNA 109.9 Chan 36	APP CRS 021°	Rwy Ldg TDZE Apt Elev	7702 599 599
---	------------------------	-----------------------------	---

ILS RWY 2L (CAT II & III)
NASHVILLE INTL (BNA)

DME or RADAR required. RADAR required for procedure entry.	ALSF-2	MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on heading 240° and on BNA VORTAC R-270 to BEVEE/BNA VORTAC 22.4 DME/RADAR and hold.
Simultaneous approach authorized. Cat II: RVR 1000 Authorized with specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown.		

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
------------------------	--	---------------------------------------	-------------------------------

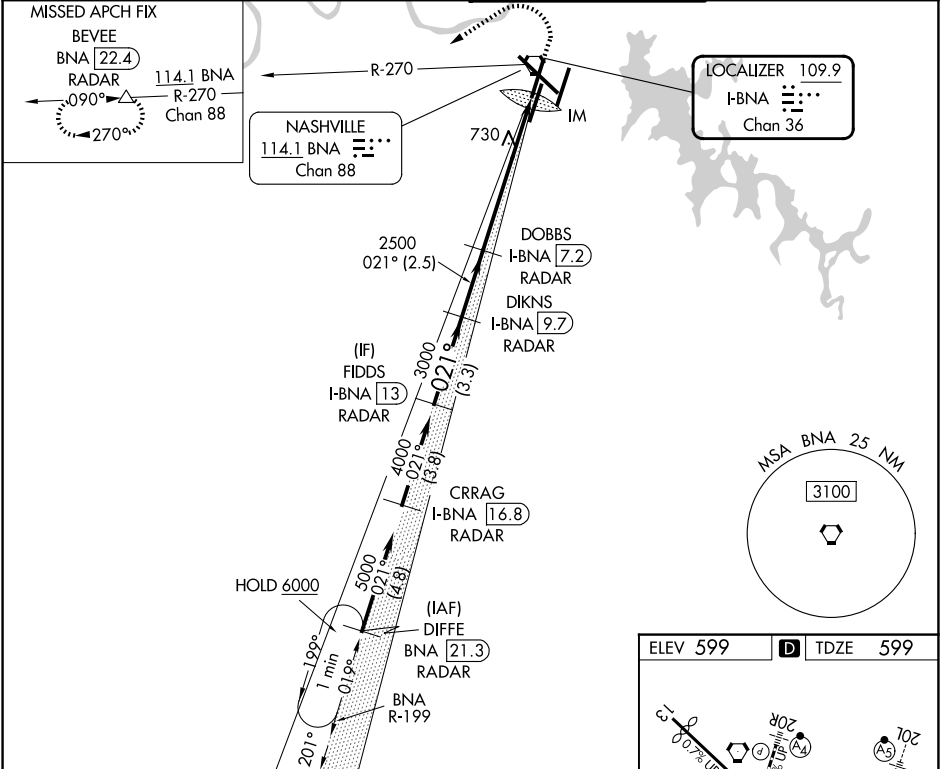

CATEGORY	A	B	C	D
S-ILS 2L	CAT II	RA 105/12	100 DA 699	
S-ILS 2L	CAT III	RVR 600		

CATEGORY II & III ILS - SPECIAL AIRCREW
& AIRCRAFT CERTIFICATION REQUIRED

