
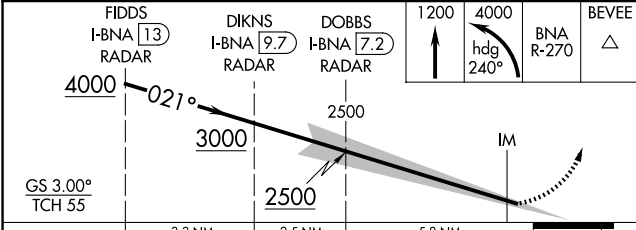


LOC/DME I-BNA 109.9 Chan 36	APP CRS 021°	Rwy Ldg TDZE 599 Apt Elev 599
---	------------------------	---

ILS RWY 2L (SA CAT I)
NASHVILLE INTL (BNA)

DME or RADAR required. RADAR required for procedure entry.	ALSF-2	MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on heading 240° and on BNA VORTAC R-270 to BEVEE/BNA VORTAC 22.4 DME/RADAR and hold.
Simultaneous approach authorized. Requires specific OPSPEC, MSPEC, or LOA approval.		

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
------------------------	--	---------------------------------------	-------------------------------

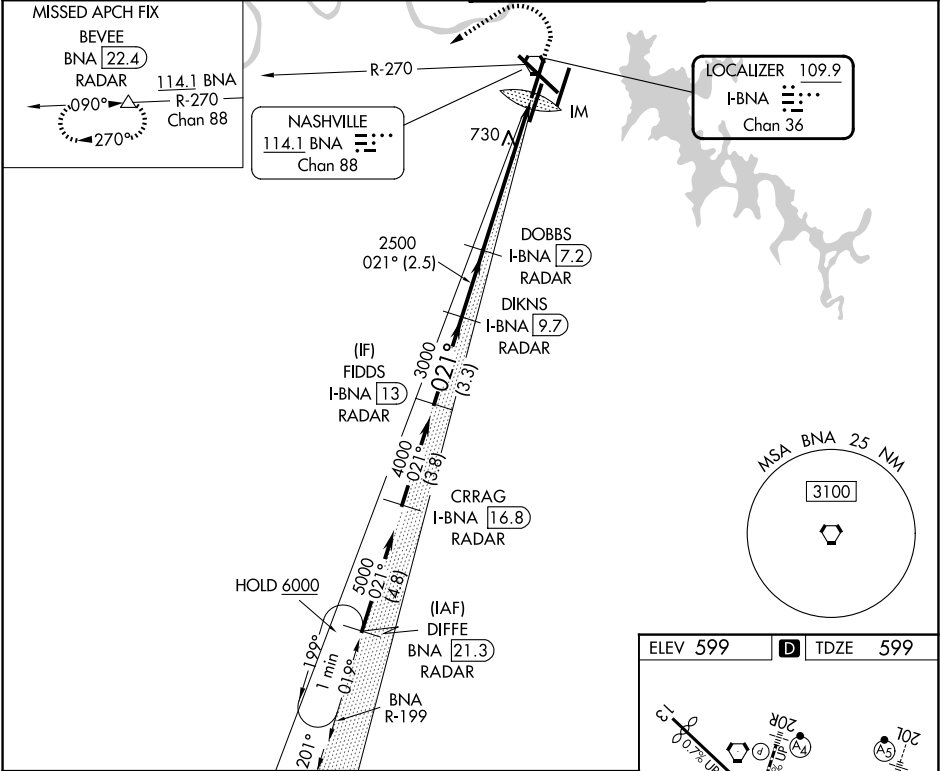

CATEGORY	A	B	C	D
S-ILS 2L	RA 155/14 150 DA 749			

SA CATEGORY I ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

