

PARDN THREE DEPARTURE (RNAV)

TOP ALTITUDE:
4000

D-ATIS 135.1

CLNC DEL 126.05

CPDLC

GND CON



121.9 348.6

NASHVILLE TOWER

118.6 257.8

NASHVILLE DEP CON

119.35 372.0



NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.


NOTE: Radar required.

NOTE: For Turbojet aircraft only.

NOTE: Transponder code will be issued via PDC or

Nashville clearance delivery:

NOTE: If unable to accept climb rates, advise ATC on initial contact.

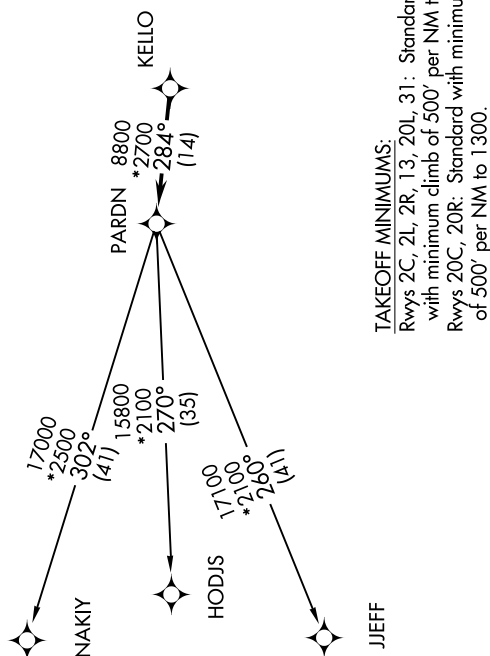

TAKEOFF MINIMUMS:

Rwys 2C, 2L, 2R, 13, 20L, 31: Standard

with minimum climb of 500' per NM to 1100.

Rwys 20C, 20R: Standard with minimum climb

of 500' per NM to 1 300;

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWYS 2L/C/R: Climb heading 021° or assigned ATC heading, thence....

TAKEOFF Rwy 13: Climb heading 136° or assigned ATC heading, thence.....

TAKOFF RWYS: Climb heading 201° or assigned ATC heading thence
TAKOFF RWYS 201/C/R. Climb heading 201° or assigned ATC heading thence

TAKEOFF RWY 31: Climb heading 316° or assigned ATC heading, thence

....expect radar vectors to KELLO, then on track 284° to PARDN. Maintain 4000.

Expect clearance to filed altitude within five (5) minutes after departure.

HODJS TRANSITION (PARDN3.HODJS)

JEFF TRANSITION (PARDN3.JEFF)

NAKIY TRANSITION (PARDN3 NAKIY)

PARDN THREE DEPARTURE (RNAV)

(PARDN3.PARDN) 25JUN15

NASHVILLE, TENNESSEE
NASHVILLE INTL (BNA)