


APP CRS	Rwy Ldg	9487
136°	TDZE	567
	Apt Elev	599

RNAV (GPS) RWY 13

NASHVILLE INTL (BNA)

RNP APCH.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C.	MISSED APPROACH: Climb to 3000 direct ONUGE and hold.
-----------	--	---

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6	CLNC DEL 126.05	CPDLC
-----------------	--	--------------------------------	------------------------	--------------------	-------

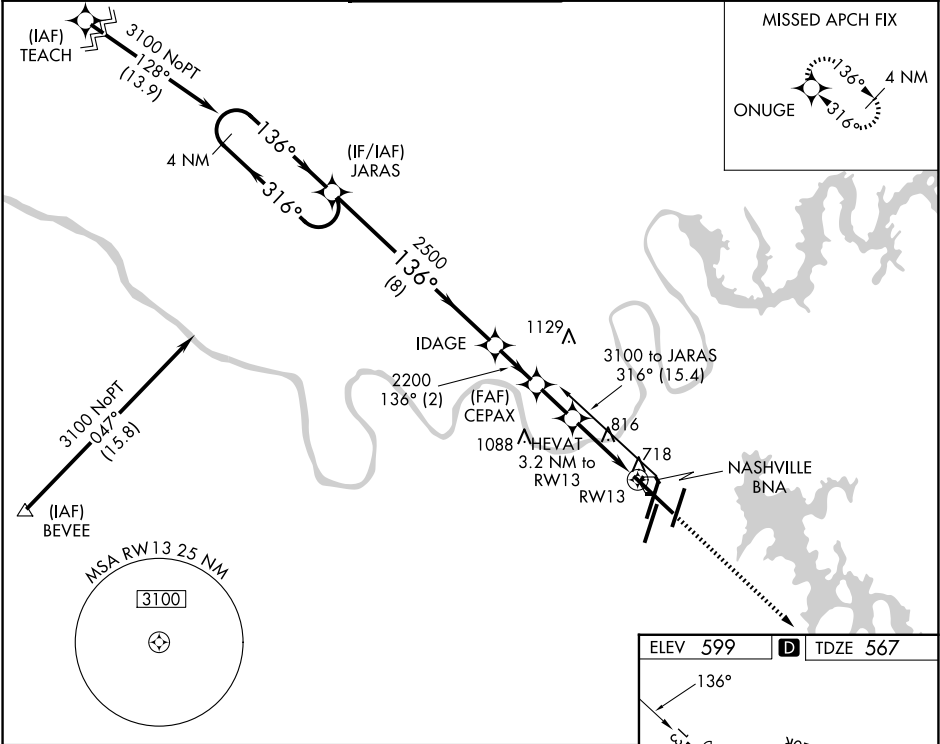

4 NM Holding Pattern JARAS				
GP 3.00° TCH 55				
3100 ← 316° → 136° → 2500 → 136° → 2200 → 1600 → 1360 → RW13				
8 NM 2 NM 1.8 NM 1.9 NM 1.3				
CATEGORY	A	B	C	D
LNAV/VNAV DA	968-1½ 401 (400-1½)			
LNAV MDA	1080-1	513 (500-1)	1080-1½	1080-1¾
			513 (500-1¾)	513 (500-1¾)
CIRCLING	1100-1	1120-1	1200-1¾	1380-2½
	501 (600-1)	521 (600-1)	601 (700-1¾)	781 (800-2½)

