

APP CRS	Rwy Ldg	7702
021°	TDZE	599
	Apt Elev	599



RNAV (RNP) Z RWY 2L

NASHVILLE INTL (BNA)

RNP AR APCH - GPS. Authorization required. From BRDYY, SYNEP, MNGRL, CHUKB, or SHELE: RF.

For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized with Rwy 2R. For inop ALSF-2, increase RNP 0.15 all Cats visibility to RVR 4500.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
------------------------	--	---------------------------------------	-------------------------------

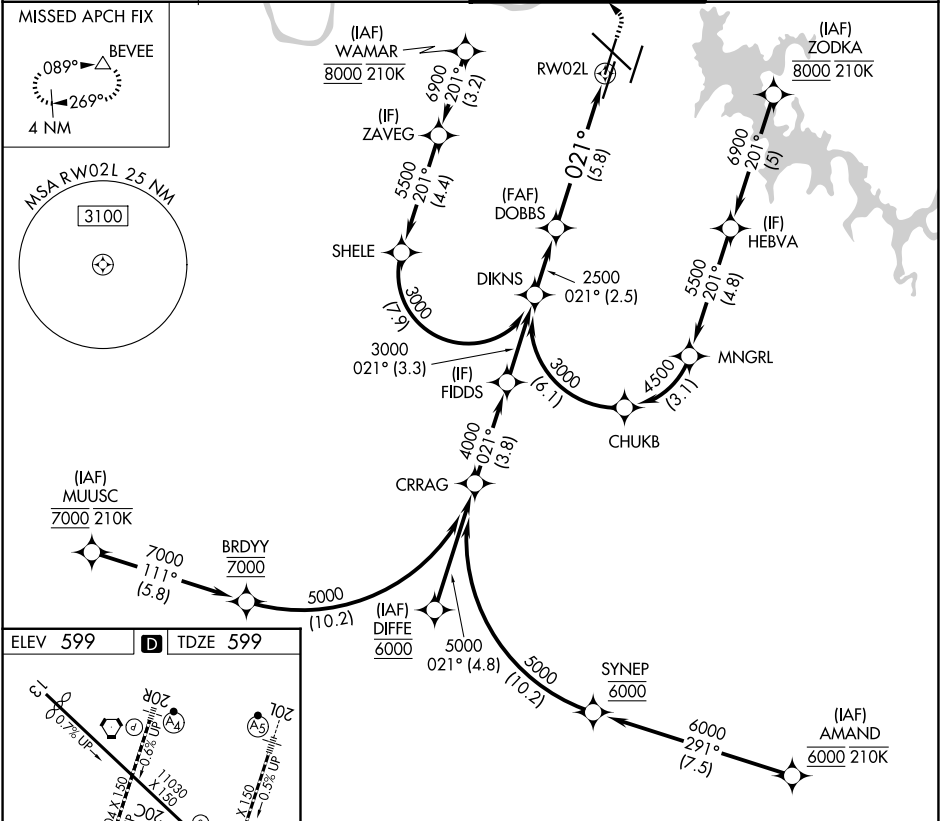

See planview for multiple IF locations.			
DIKINS	DOBBS	1200	4000
3000	2500	↑	△
GP 3.00°	2500	↘	
TCH 55			
	2.5 NM	5.8 NM	
CATEGORY	A	B	C
RNP 0.15 DA	898/24	299 (300-½)	
RNP 0.30 DA	991/35	392 (400-¾)	

SE-1, 30 OCT 2025 to 27 NOV 2025

SE-1, 30 OCT 2025 to 27 NOV 2025