

WAAS CH 49013 W20D	APP CRS 201°	Rwy Ldg 8000 TDZE 551 Apt Elev 599
--	------------------------	---

RNAV (GPS) Y RWY 20L

NASHVILLE INTL (BNA)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C.
A Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations.
 *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH:
Climb to 1300, then
climbing left turn to
4000 direct LENON
and hold.

D-ATIS

135.1

NASHVILLE APP CON


118.4 360.7 (030°-196°)
119.35 372.0 (197°-029°)

NASHVILLE TOWER

118.6 257.8


GND CON

121.9 348.6

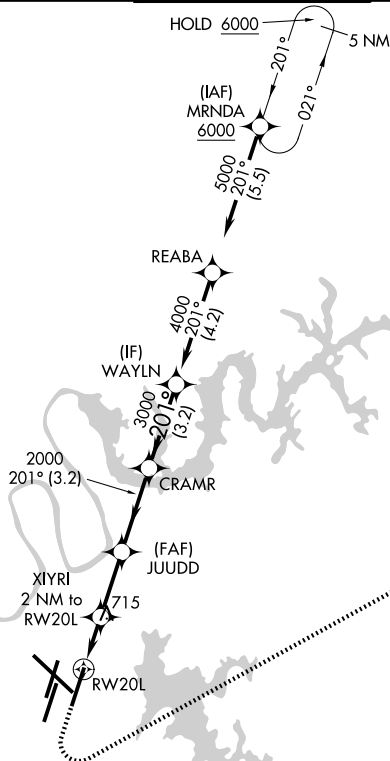

MISSED APCH FIX


4 NM




LENON

ELEV 599		TDZE 551
----------	---	----------

1

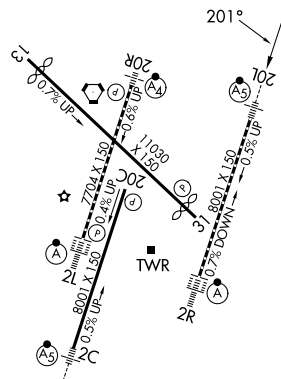

HIRL all Rwy's
TDZ/CL Rwy's 2L and 2R
REIL Rwy's 13, 20C, and 31

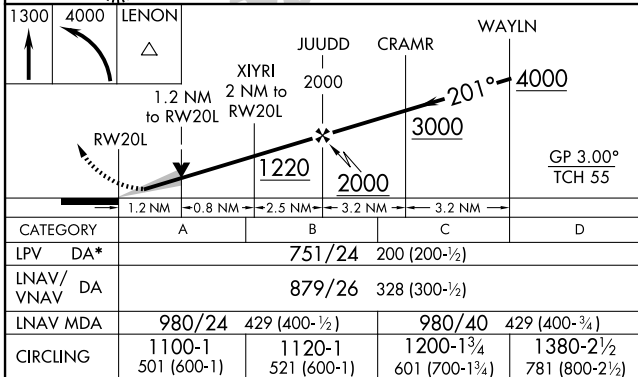

NASHVILLE, TENNESSEE

Amdt 3 02OCT25

36°07'N-86°41'W

NASHVILLE INTL (BNA)

RNAV (GPS) Y RWY 20L