

WAAS CH 93713 W02D	APP CRS 021°	Rwy Ldg 8000 TDZE 590 Apt Elev 599
--	------------------------	---

RNAV (GPS) Y RWY 2R
NASHVILLE INTL (BNA)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS increase LNAV/VNAV visibility all Cnts to RVR 5500.

ALSF-2



MISSED APPROACH: Climb to 1300, then climbing right turn to 4000 direct LENON and hold.

D-ATIS

135.1

NASHVILLE APP CON


118.4 360.7 (030°-196°)
119.35 372.0 (197°-029°)

NASHVILLE TOWER

118.6 257.8

GND CON

121.9 348.6

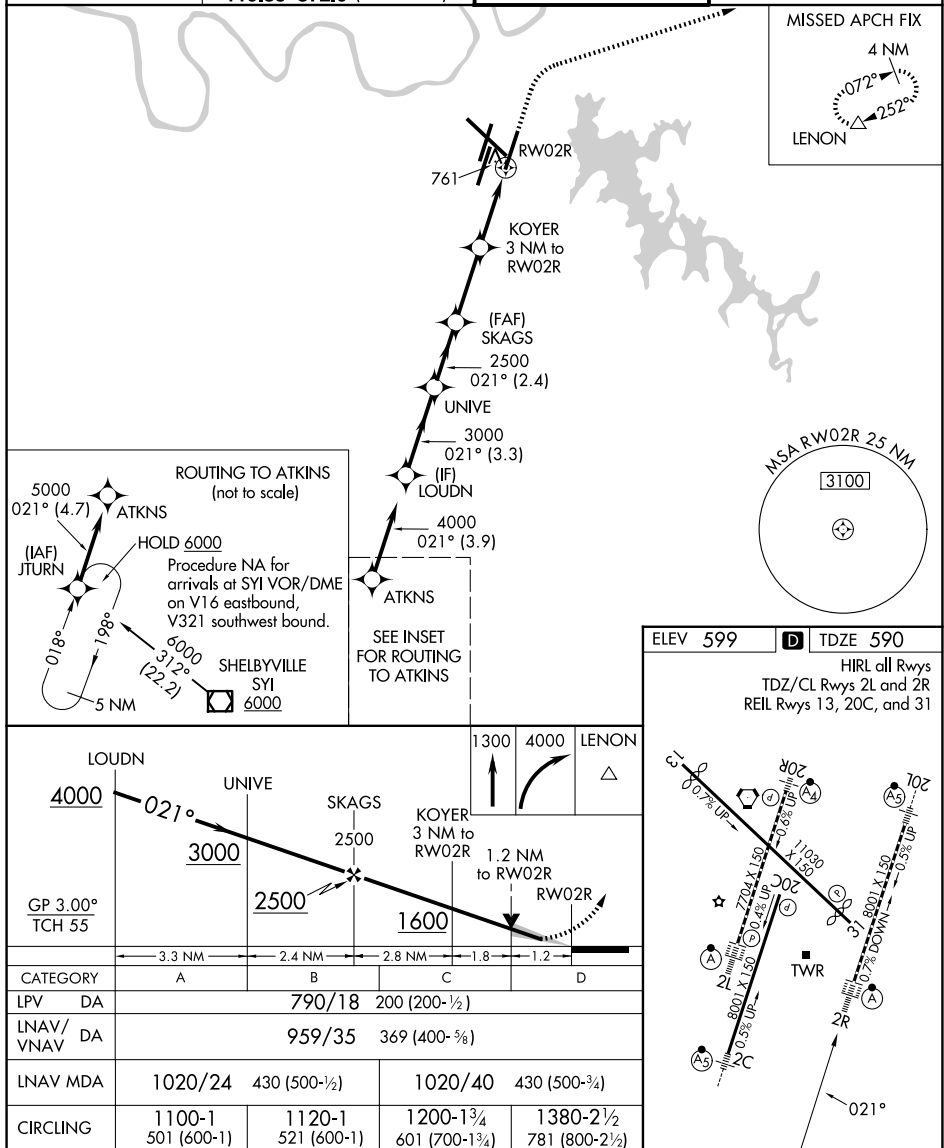

NASHVILLE, TENNESSEE
Amdt 3 02OCT25

36°07'N-86°41'W

NASHVILLE INTL (BNA)

RNAV (GPS) Y RWY 2R

SE-1, 30 OCT 2025 to 27 NOV 2025

SE-1, 30 OCT 2025 to 27 NOV 2025