


TOP ALTITUDE:
Assigned by ATC

D-ATIS	125.85
CLNC DEL	124.35
GND CON	121.9 348.6
ROGERS TOWER	119.35 269.45
MOKE CITY DEP CON	124.2 336.4

Standard with minimum climb of 500' per NM to 1800.

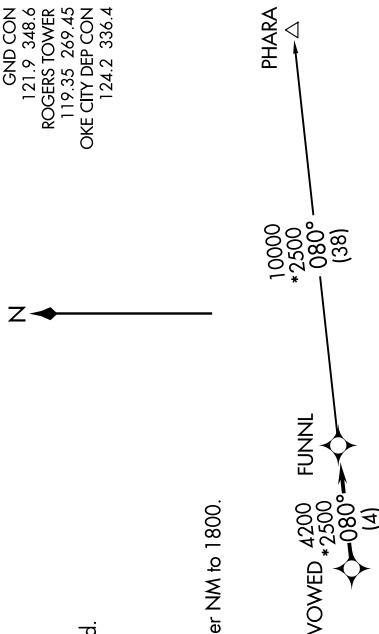


DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 13: Climb heading 131° to 1800, then right turn heading 176° or as assigned by ATC, expect RADAR vectors to VOWED, thence
 TAKEOFF RWYS 17L/R, 18: Climb heading 176° to 1800, then heading 176° or as assigned by ATC, expect RADAR vectors to VOWED, thence
 TAKEOFF RWY 31: Climb heading 311° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to VOWED, thence
 TAKEOFF RWYS 35L/R, 36: Climb heading 356° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to VOWED, thence

..... on track 080° to FUNNIL, then on (transition). Maintain 5000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

PHARA TRANSITION (FUNNL3.PHARA):

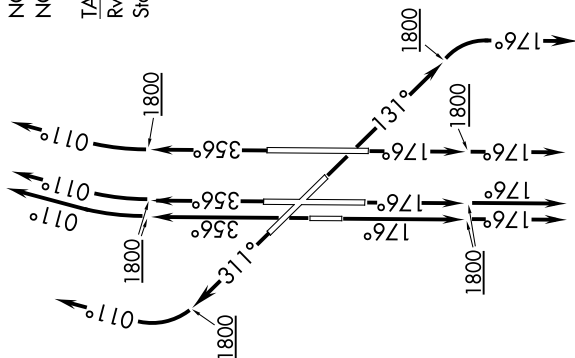

NOTE: Chart not to scale.