


WAAS CH 58125 W25A	APP CRS 253°	Rwy Ldg TDZE 113 Apt Elev 113
--	------------------------	---


RNAV (GPS) RWY 25

ORLANDO EXEC (ORL)

RNP APCH - GPS.					MISSED APPROACH: Climb to 600 then climbing right turn to 1700 direct FTEEN and hold.	
⚠ Circling Rwy 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. In minimum visibility conditions, bright lights on highway ½ mile south of airport may be mistaken for runway lights.						
ATIS 127.25	ORLANDO APP CON 124.8 351.9	EXECUTIVE TOWER ★ 118.7(CTAF) 0 239.0	GND CON 121.4 239.0	CLNC DEL 128.45	CLNC DEL 125.225 (When twr closed)	UNICOM 122.95

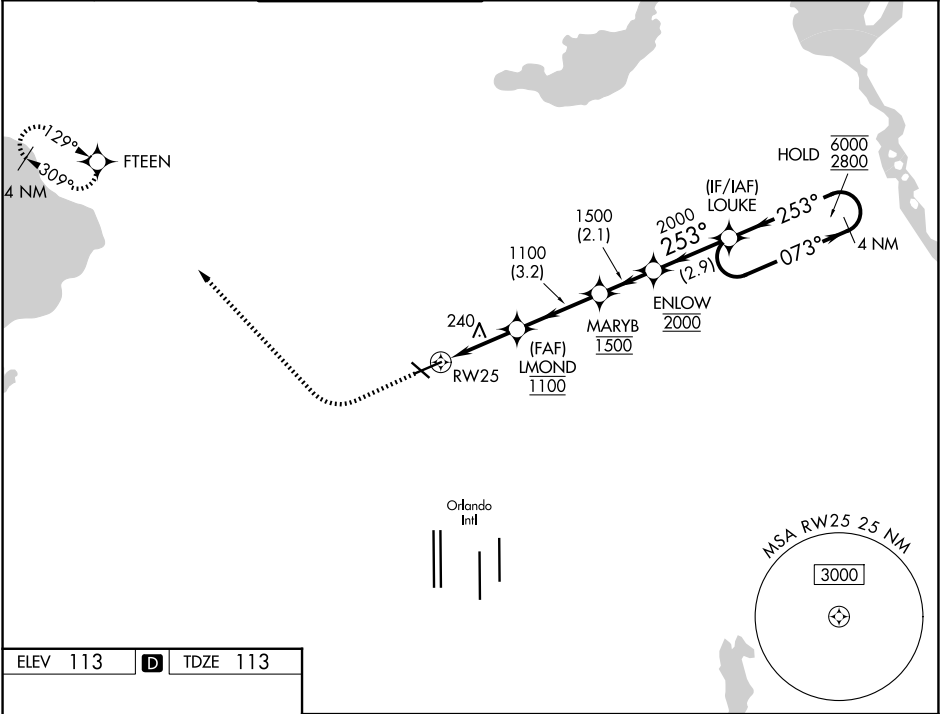

ELEV 113	D	TDZE 113
-----------------	----------	-----------------

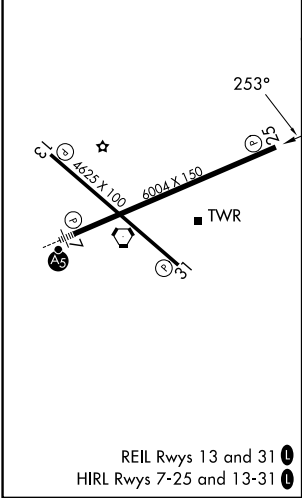

600 ↑		1700 ↗		FTEEN ✦		4 NM Holding Pattern	
RW25 ↙		1.2 NM to RW25 ↓		LMOND ✕ 1100		MARYB 1500	
				ENLOW 2000		LOUKE 073° → 6000 ← 253° 2800	
				253°		GP 3.00° TCH 46	
1.2		1.8		3.2 NM		2.1 NM	
				2.9 NM			
CATEGORY		A		B		C	
D							
LPV DA		313-¾		200 (200-¾)			
LNAV/VNAV DA		390-⅞		277 (300-⅞)			
LNAV MDA		500-1 387 (400-1)		500-1¼ 387 (400-1¼)			
CIRCLING		580-1 467 (500-1)		680-1 567 (600-1)		860-2¼ 747 (800-2¼)	
						860-2½ 747 (800-2½)	

SE-3, 30 OCT 2025 to 27 NOV 2025

SE-3, 30 OCT 2025 to 27 NOV 2025