


D-ATIS 133.4
PHILADELPHIA APP CON
124.35 319.15
PHILADELPHIA TOWER
118.5 327.05
(Rwys 9L/27R, 8/26 and 17/35)
135.1 327.05
(Rwy 9R/27L)
GND CON
121.9 348.6

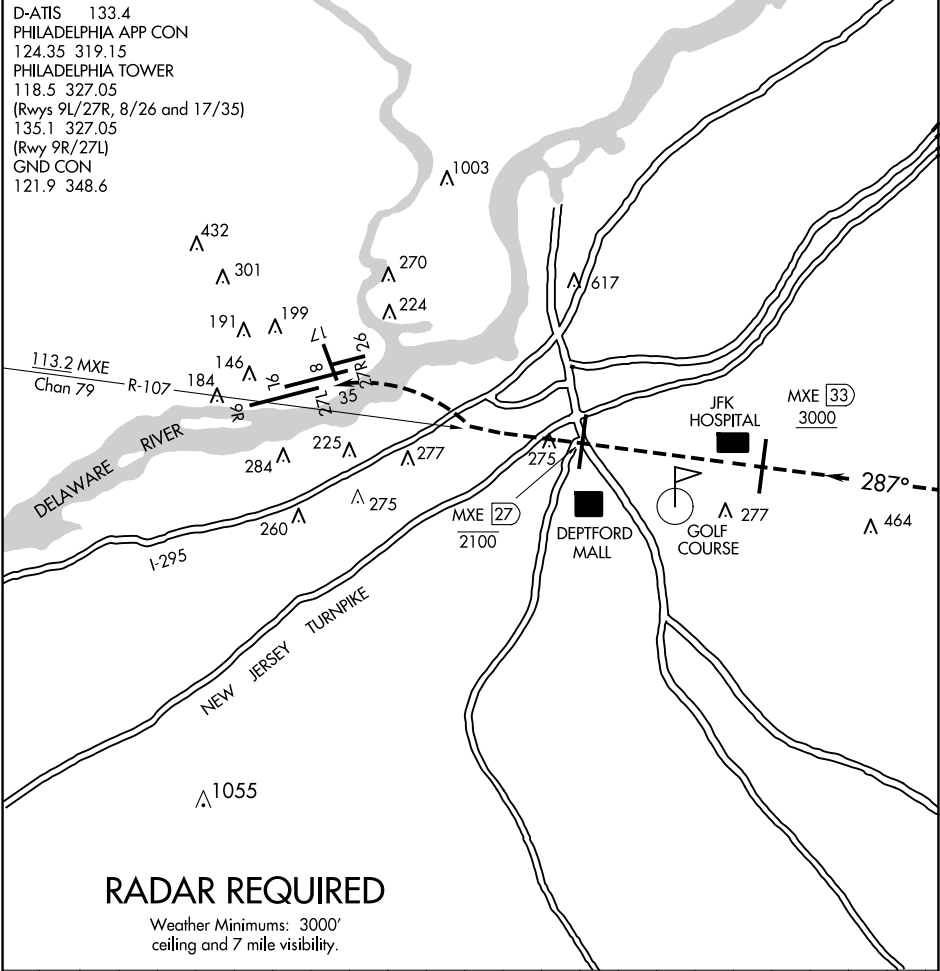

RADAR REQUIRED

Weather Minimums: 3000'
ceiling and 7 mile visibility.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----

LIBERTY VISUAL RWY 27L

Expect RADAR vectors to the MXE R-107.
Proceed Northwest on the MXE R-107 inbound for Rwy 27L.
Report the airport in sight to final controller.
Aircraft must remain on the MXE R-107 until the MXE R-107/27 DME;
then proceed visually to Rwy 27L or as assigned by the tower.
Expect aircraft to be utilizing a simultaneous visual or ILS approach
to Rwy 27R during this operation.