

WAAS CH 45523 W09B	APP CRS 087°	Rwy Ldg 9500 TDZE 13 Apt Elev 36
--	------------------------	---

RNAV (GPS) Y RWY 9L
PHILADELPHIA INTL (PHL)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to RVR 4500, all Cats.
RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 1500, then climbing right turn to 3000 direct OOD VORTAC and hold.

D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6
------------------------	--	--	-------------------------------

Procedure NA for arrivals at MXE VORTAC
on airway radials 129 CW 177.

* 3000 when authorized by ATC.

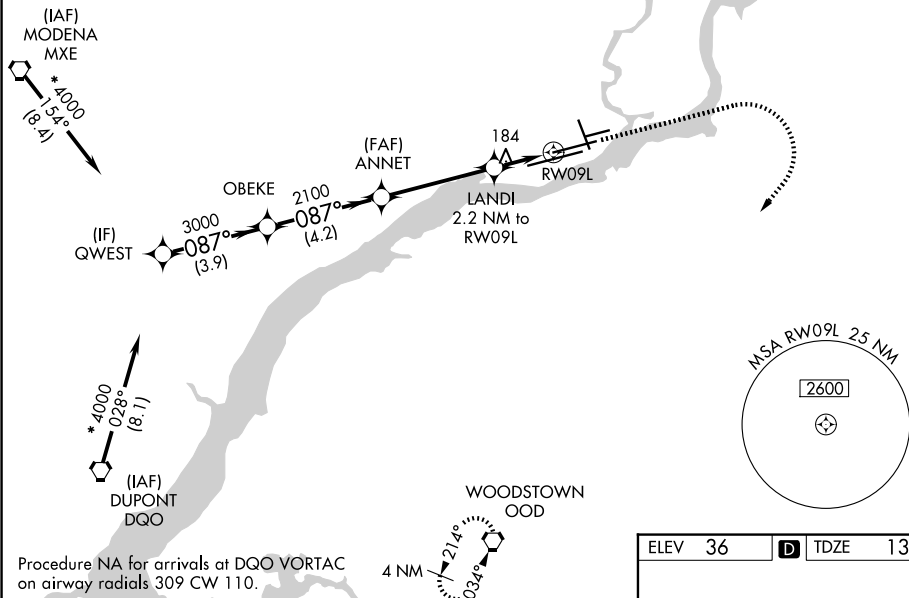

Procedure NA for arrivals at DQO VORTAC
on airway radials 309 CW 110.

* 3000 when authorized by ATC.

