


LOC I-RGJ <u>110.7</u>	APP CRS 157°	Rwy Ldg TDZE Apt Elev	9003 167 168
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 16
RICHMOND INTL (RIC)

 For inop ALS, increase S-LOC 16 Cats C and D visibility to 2 SM. GORDD Fix  Minimums: for inop ALS, increase S-LOC 16 Cats C and D visibility to 1½ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA. % DME from RIC VORTAC.	 MALS 	MISSED APPROACH: Climb to 2000 direct HPW VORTAC and hold.
--	--	--

ATIS		POTOMAC APP CON		RICHMOND TOWER		GND CON	
119.15	263.025	126.4	282.375 (001°-185°)	121.1	257.8	121.9	348.6
		126.75	307.2 (186°-360°)				

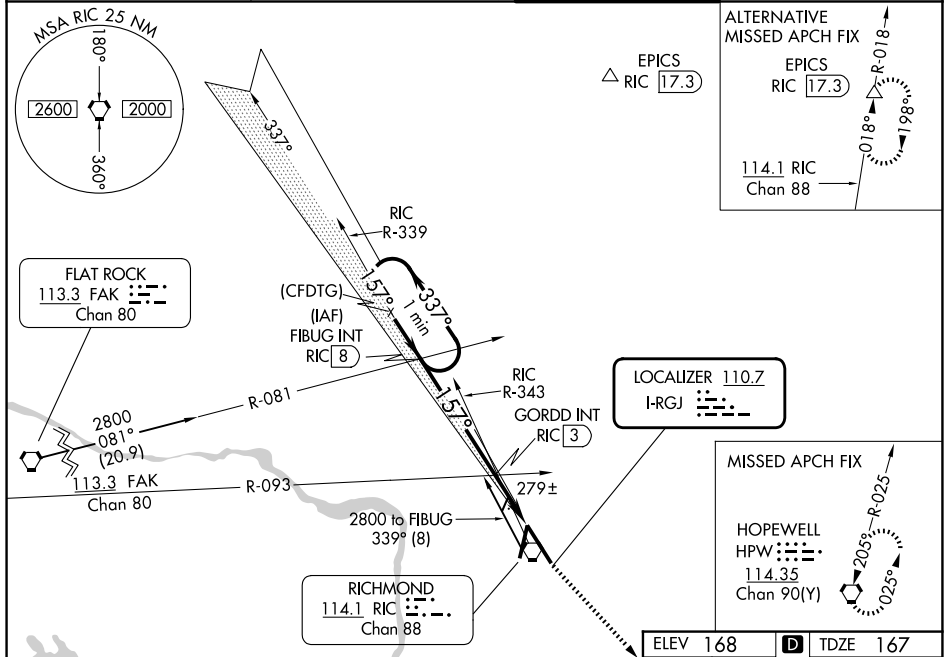

One Minute Holding Pattern

FIBUG INT RIC [8]

GORDD INT RIC [3]

***LOC only.**

RIC [0.9]

GS 3.00° TCH 54

VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 71).

2500

920

157°

5 NM

2.1 NM

CATEGORY	A	B	C	D
S-ILS 16 **		367/24	200 (200-½)	
S-LOC 16	920/24 753 (800-½)	920/40 753 (800-¾)	920-1¾	753 (800-1¾)
CIRCLING	920-1 752 (800-1)	920-1¼ 752 (800-1¼)	920-2½	752 (800-2½)

GORDD FIX MINIMUMS %

S-LOC 16	580/24	413 (500-½)	580/40	413 (500-¾)
CIRCLING	660-1	492 (500-1)	700-1½ 532 (600-1½)	720-2 552 (600-2)

TDZ/CL Rwy 34

HIRL Rwys 2-20 and 16-34

REIL Rwy 20

FAF to MAP 7.2 NM

Knots	60	90	120	150	180
Min:Sec	7:12	4:48	3:36	2:53	2:22

RICHMOND INTL (RIC)
ILS or LOC RWY 16

NE-3, 30 OCT 2025 to 27 NOV 2025

NE-3, 30 OCT 2025 to 27 NOV 2025