

WAAS
CH **69320**
W20A

APP CRS
203°

Rwy Ldg
TDZE **168**
Apt Elev **168**


RNAV (GPS) Z RWY 20

RICHMOND INTL (RIC)

RNP APCH.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). Rwy 20 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2000 direct CASEE and hold.

ATIS 119.15 263.025	POTOMAC APP CON 126.4 282.375 (001°-185°) 126.75 307.2 (186°-360°)	RICHMOND TOWER 121.1 257.8	GND CON 121.9 348.6
-------------------------------	--	--------------------------------------	-------------------------------

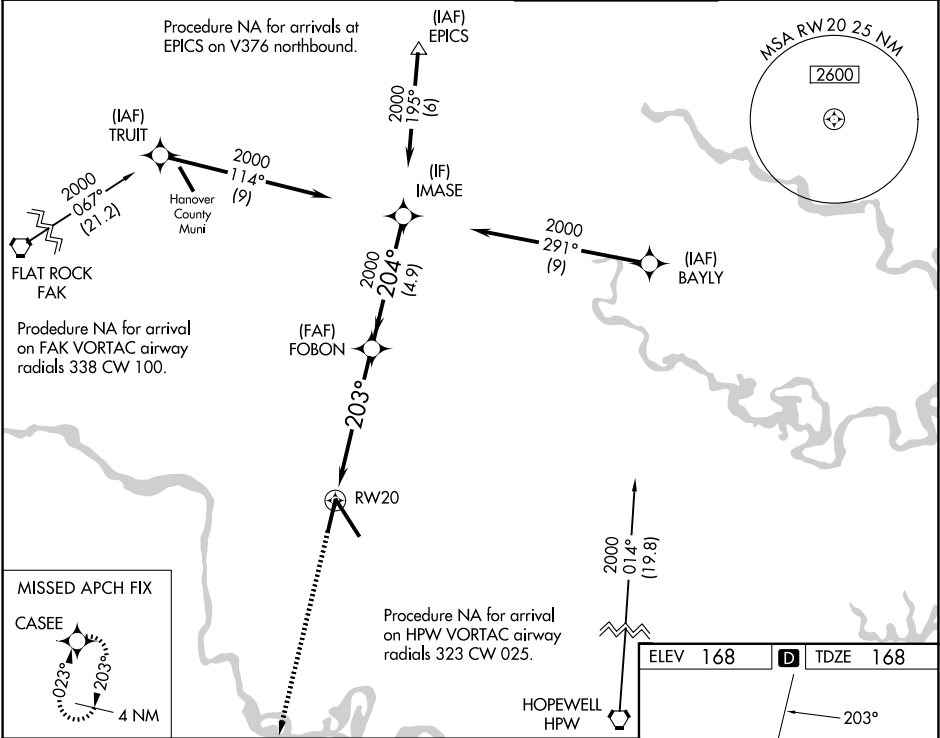

2000	CASEE	*LNAV only.	FOBON	IMASE
↑	✱	*1.5 NM to RWY20	2000	2000
RWY20				
1.5 NM 4.1 NM 4.9 NM				
CATEGORY	A	B	C	D
LPV DA	464-7/8		296 (300-7/8)	
LNAV/VNAV DA	603-1 1/2		435 (500-1 1/2)	
LNAV MDA	680-1	512 (600-1)	680-1 3/8	512 (600-1 3/8)
CIRCLING	680-1	512 (600-1)	700-1 1/2 532 (600-1 1/2)	720-2 552 (600-2)

