

APP CRS  
**072°**

Rwy Ldg  
TDZE  
Apt Elev  
**1175**  
**1175**

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (R.O.A)

**RNAV (GPS) Y RWY 6**


RNP APCH - GPS.

Circling NA northwest of Rwy 6-24.  
For inop ALS, increase LNAV Cat C and D visibility to 2½ SM.

MALSR

MISSED APPROACH: Climbing right turn to 4000 direct DEWET and hold.  
\* Missed approach requires minimum climb of 276 feet per NM to 2700.

|                        |                                         |                                     |                               |
|------------------------|-----------------------------------------|-------------------------------------|-------------------------------|
| ATIS<br><b>132.375</b> | ROANOKE APP CON<br><b>133.225 339.8</b> | ROANOKE TOWER<br><b>118.3 257.8</b> | GND CON<br><b>121.9 257.8</b> |
|------------------------|-----------------------------------------|-------------------------------------|-------------------------------|

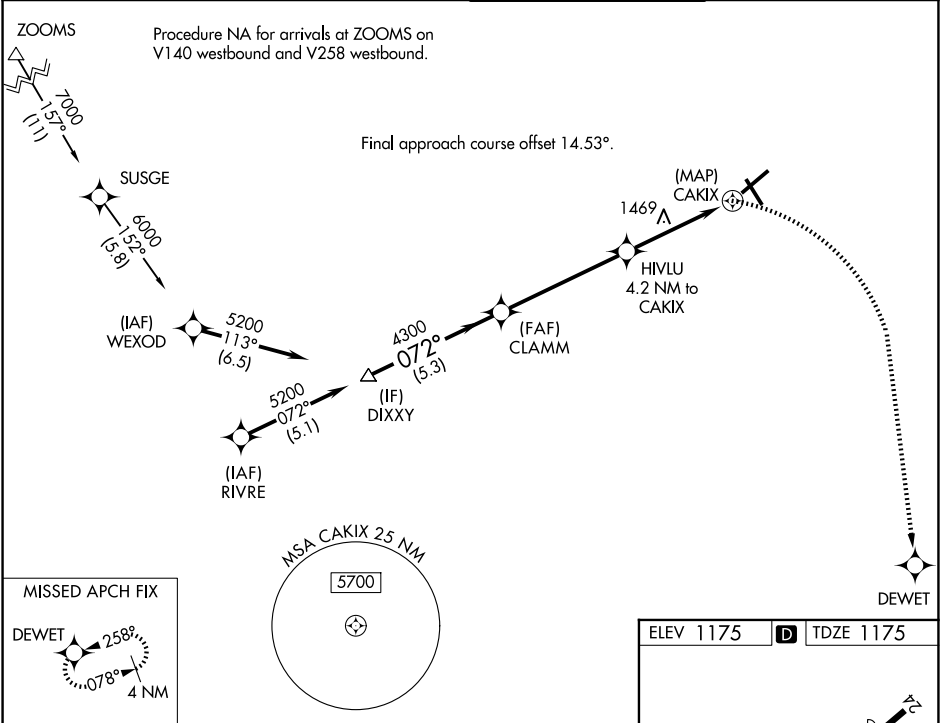

4000 DEWET

91 6800 X 150 0 0 0

TWR

5810 X 150 0 0 0

0.4% UP

072°

|           |                       |                         |                         |                         |     |  |
|-----------|-----------------------|-------------------------|-------------------------|-------------------------|-----|--|
|           | 5.3 NM                | 5 NM                    | 3.1 NM                  | 1.1                     | 0.5 |  |
| CATEGORY  | A                     | B                       | C                       | D                       |     |  |
| LNAV MDA* | 1720-½                | 545 (600-½)             | 1720-1⅛                 | 545 (600-1⅛)            |     |  |
| LNAV MDA  | 1980-½<br>805 (900-½) | 1980-¾<br>805 (900-¾)   | 1980-1⅞                 | 805 (900-1⅞)            |     |  |
| CIRCLING  | 1980-1<br>805 (900-1) | 1980-1¼<br>805 (900-1¼) | 2460-3<br>1285 (1300-3) | 2800-3<br>1625 (1700-3) |     |  |

REIL Rwy 6 and 24  
HIRL Rwy 6-24 and 16-34