
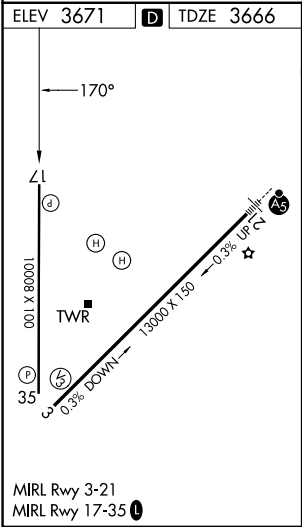



WAAS CH 65702 W17A	APP CRS 170°	Rwy Ldg 10008 TDZE 3666 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 17

ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.		MISSED APPROACH: Climb to 6000 direct KIGDE and hold.			
▼ ▲ ASR					
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C . When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 3996 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4083 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Artesia altimeter setting.					
ATIS 128.45 306.2	ROSWELL APP CON* 119.6 239.0	ROSWELL TOWER* 118.5(CTAF) 0 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95

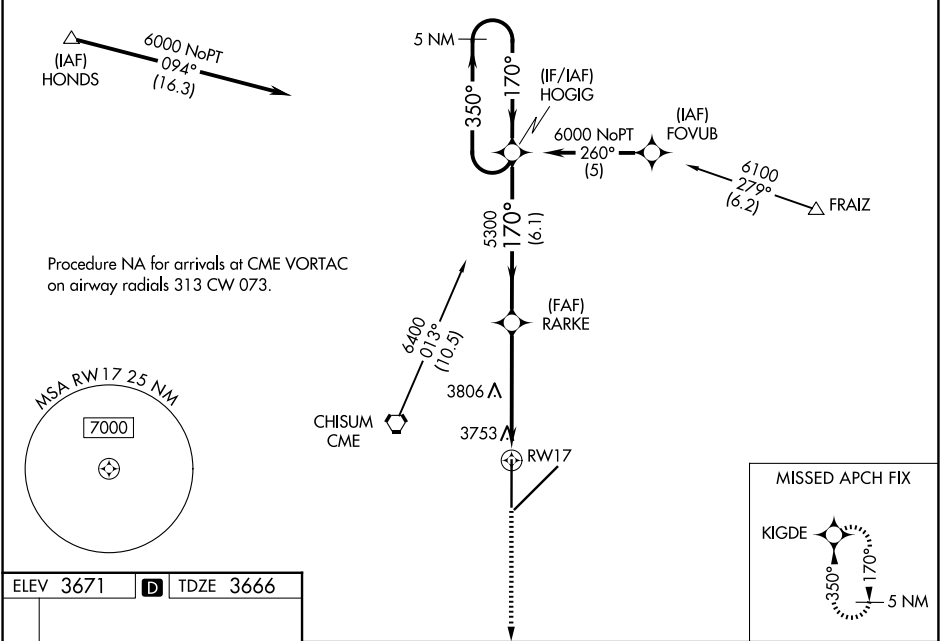

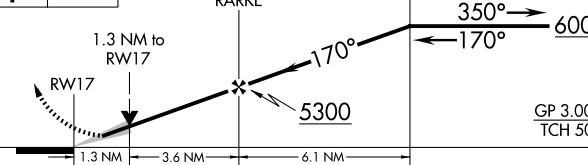6000		KIGDE			
					
					
CATEGORY		A	B	C	D
LPV DA		3916- ³ / ₄ 250 (300- ³ / ₄)			
LNAV/VNAV DA		4003-1 ¹ / ₄ 337 (400-1 ¹ / ₄)			
LNAV MDA		4120-1 454 (500-1)	4120-1 ¹ / ₄ 454 (500-1 ¹ / ₄)	4120-1 ¹ / ₂ 454 (500-1 ¹ / ₂)	
CIRCLING		4140-1 ¹ / ₄ 469 (500-1 ¹ / ₄)	4140-1 ¹ / ₂ 469 (500-1 ¹ / ₂)	4300-2 629 (700-2)	