

WAAS CH 50202 W03A	APP CRS 035°	Rwy Ldg 13000 TDZE 3667 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 3

ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

▼


▲

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, Use Artesia altimeter setting; increase LPV DA to 3997 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4067 feet and all visibilities ⅓ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅔ SM, Cat D ⅓ SM and Circling visibility Cat D ¼ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5 (CTAF) 0 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

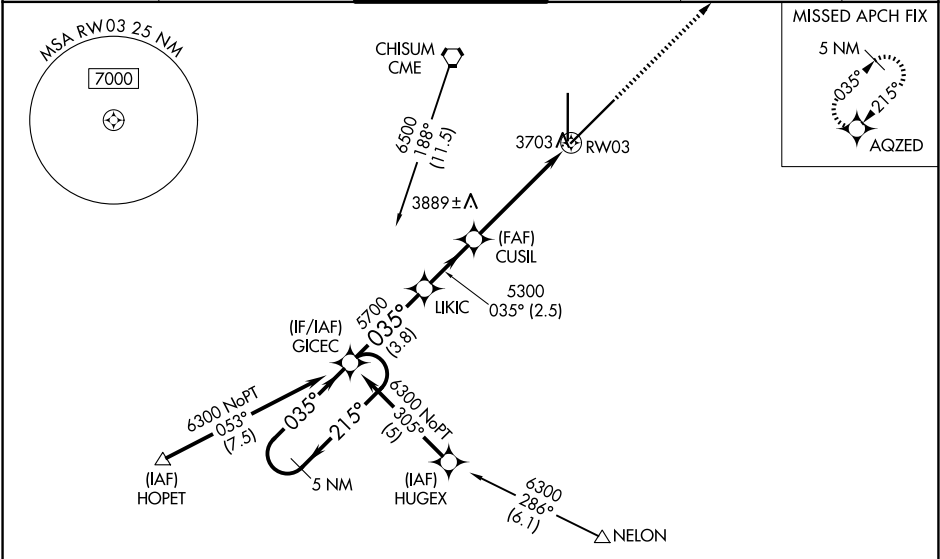

ELEV 3671		D TDZE 3667	
5 NM Holding Pattern		6000 AQZED	
GP 3.00° TCH 50		1.3 NM to RWY 03	
CATEGORY		A B C D	
LPV DA		3917-¾ 250 (300-¾)	
LNAV/VNAV DA		3987-1 320 (400-1)	
LNAV MDA		4140-1 473 (500-1)	4140-1½ 473 (500-1½)
CIRCLING		4140-1 469 (500-1)	4300-2 629 (700-2)

3.8 NM 2.5 NM 3.6 NM 1.3 NM

001 X 8000 10000 35 035° 0.3% DOWN 13000 X 150 0.3% UP CL

MIRL Rwy 3-21 MIRL Rwy 17-35