
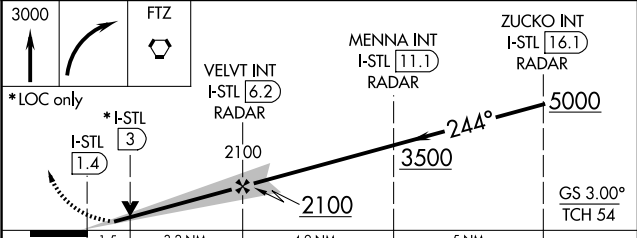
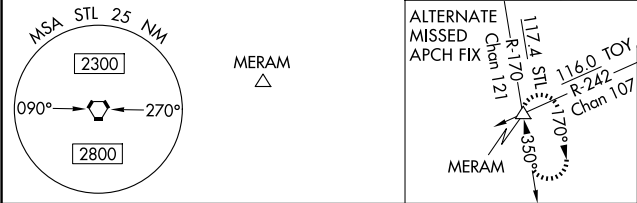


LOC/DME I-STL	APP CRS	Rwy Ldg TDZE	7603
110.3	244°	534	
Chan 40		Apt Elev	618

ILS or LOC RWY 24


ST LOUIS LAMBERT INTL (STL)

RADAR required for procedure entry.				MALS	MISSED APPROACH: Climb to 3000 then right turn direct FTZ VORTAC and hold.
▼ Inop table does not apply to S-ILS 24. For inop ALS, increase S-LOC 24 Cat E visibility to 1½ SM.				(A4)	
D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON	CLNC DEL	CPDLC
125.025 379.925	132.125 360.6	120.05 284.6	121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	119.5 363.1	

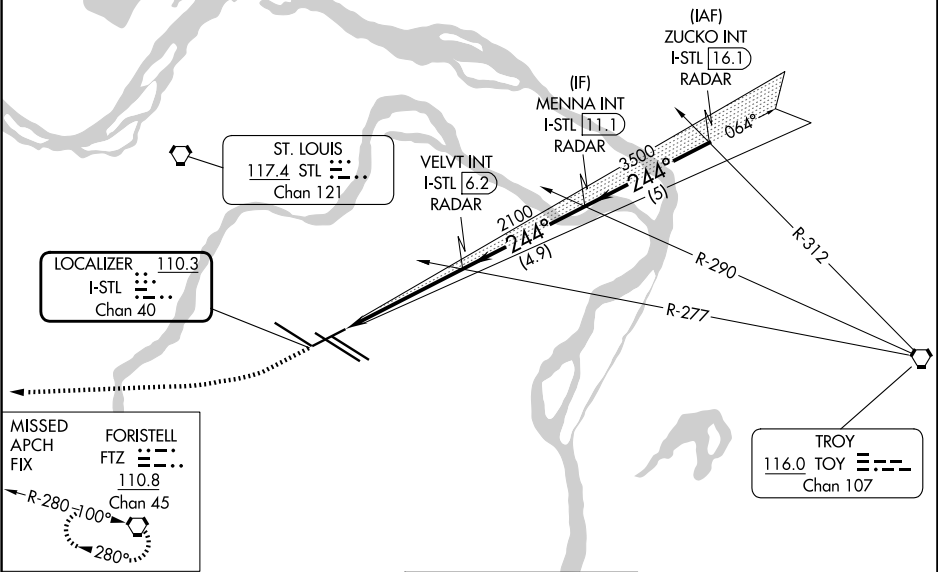

CATEGORY	A	B	C	D	E
S-ILS 24	734/40 200 (200-¾)				
S-LOC 24	1080/40	546 (500-¾)	1080-1⅜	546 (500-1⅜)	

ELEV 618	D	TDZE 534
Rwy 6-24 7603 X 150 Rwy 11-29 9000 X 150 Rwy 12L-30R 9013 X 150 Rwy 12R-30L 11020 X 150		



HIRL all Rwy's					
TDZ/CL Rwy's 11, 12L, 12R, 29, and 30R					
FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36