

APP CRS 303°	Rwy Ldg TDZE Apt Elev	9013 605 618
------------------------	-----------------------------	---

RNAV (RNP) Z RWY 30R
ST LOUIS LAMBERT INTL (STL)

T For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized with Rwy 29, except for arrivals at JYAAR and PEJAA. Use of FD or AP required during simultaneous operations. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 6000.

ALSF-2



MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct FASHE and hold.

D-ATIS
125.025
379.925

ST. LOUIS APP CON
132-125 360-6


ST. LOUIS TOWER
120.05 284.6

GND CON
121.9 348.6 (Inbound)
121.65 377.175 (Outbound)
118.925 227.125 (Rwy 11/29)

CLNC DEL
119.5 363.1


CPDLC

RADAR REQUIRED

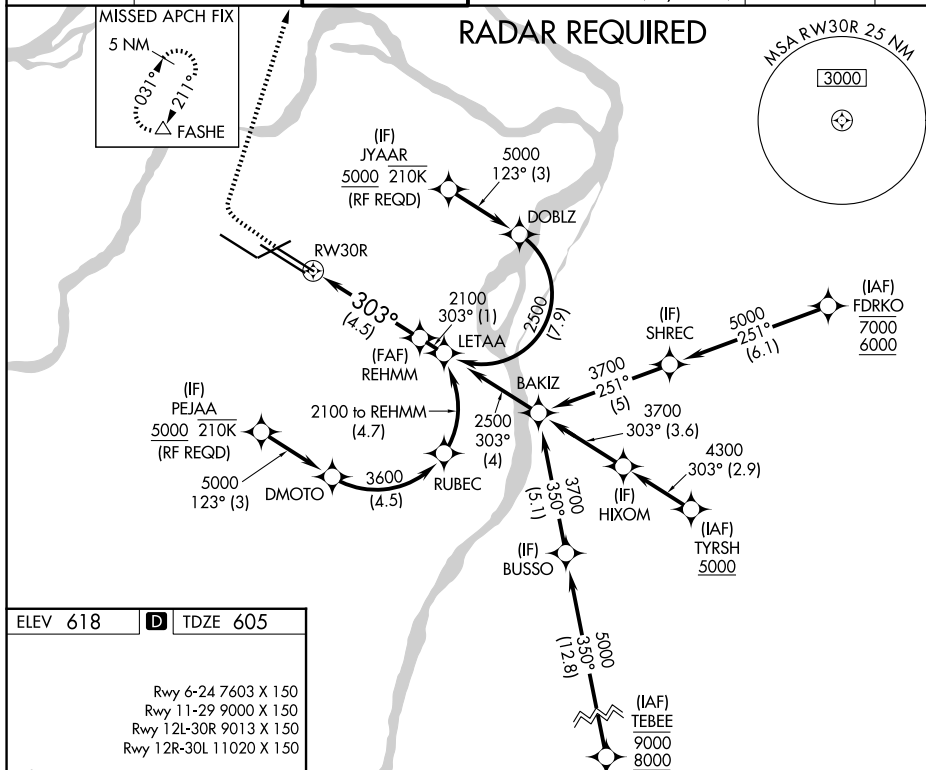

ELEV 618	D	TDZE 605
----------	----------	----------

Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150



HIRL all Rwy's
TDZ/CL Rwy's 11, 12L, 12R, 29, and 30R

ST. LOUIS, MISSOURI
Orig-C 29MAR18

38°45'N-90°22'W

ST LOUIS LAMBERT INTL (STL)
RNAV (RNP) Z RWY 30R

NC-3, 30 OCT 2025 to 27 NOV 2025

NC-3, 30 OCT 2025 to 27 NOV 2025