

LOC I-SNS	APP CRS	Rwy Idg	4825
<u>108.5</u>	315°	TDZE	82
		Apt Elev	84

LOC RWY 31
SALINAS MUNI (SNS)

DME required.

T DME from SNS VORTAC. DME use requires simultaneous
A reception of I-SNS and SNS DME. Circling NA for Cats C
and D northeast of Rwy 13 and north of Rwy 26. For inop
ALS, increase S-LOC-31 visibility Cats C and D to RVR 5000.

MALSR


MISSED APPROACH: Climb to 800 then climbing left turn to 3000 on SNS VORTAC R-275 to MARNA/SNS 10.9 DME and hold, continue climb-in-hold to 3000.

ATIS
124.85

NORCAL APP CON
133.0 251.15


SALINAS TOWER ★
119.525 (CTAF) 239.3

GND CON
121.7

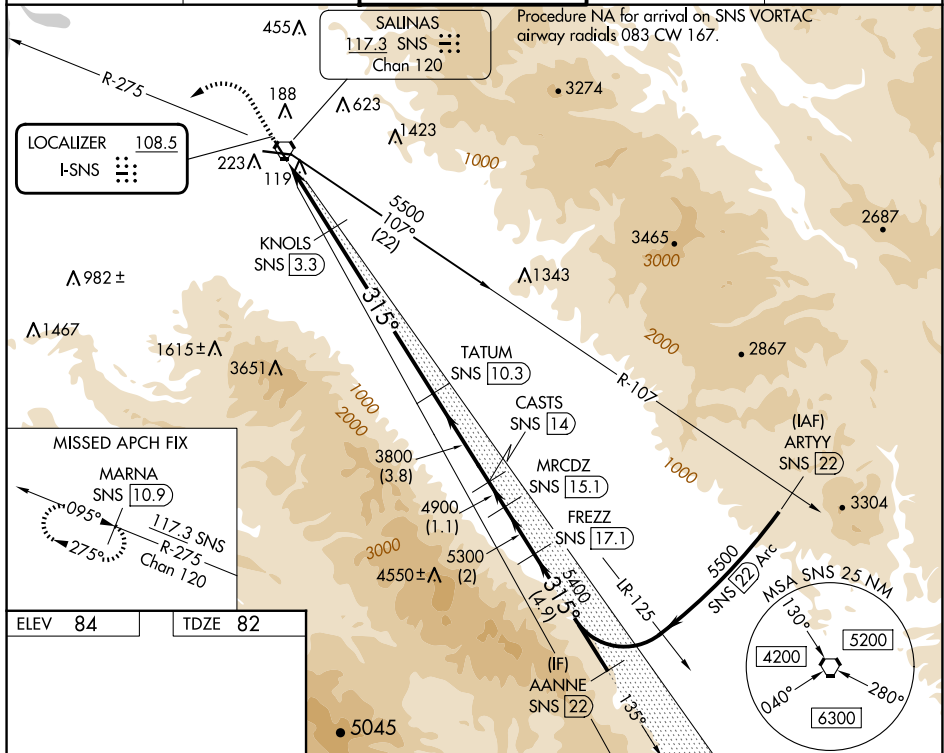UNICOM
123.0

ELEV 8

TDZE 82



HIRL Rwy 13-31 **L**
MIRL Rwy 8-26 **L**
REIL Rwy 13 and 26 **L**

800
↑
SNS R-275
MARNASNS
10.9
VGS1 and descent angles not coincident
(VGS1 Angle 3.00/TCH 59)
FREZZ
AANNESNS 22

3000
315°
5500
5400
5300
4900
3800
1220
0.9
2.1 NM
6.9 NM
3.8 NM
1.1 NM
2 NM
4.9 NM

KNOLSNSSNS 3.3
TATUMSNS 10.3
CASTSNS 14
MRCDDZSNS 15.1
FREZZSNS 17.1
AANNESNS 22

3.50°
TCH 50

CATEGORY	A	B	C	D
S-LOC 31	420/24	338 (400-½)	420/40	338 (400-¾)
CIRCLING	540-1	456 (500-1)	800-2 716 (800-2)	1740-3 1656 (1700-3)