
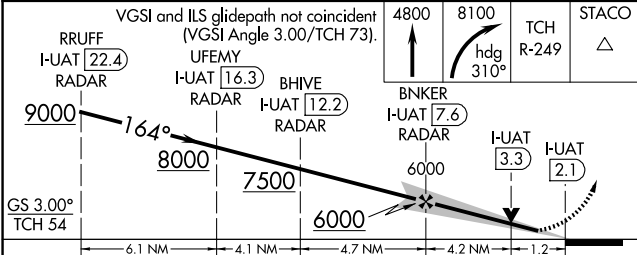


|                                                 |                        |                                                                  |
|-------------------------------------------------|------------------------|------------------------------------------------------------------|
| LOC/DME I-UAT<br><b>111.9</b><br>Chan <b>56</b> | APP CRS<br><b>164°</b> | Rwy Ldg <b>12000</b><br>TDZE <b>4226</b><br>Apt Elev <b>4231</b> |
|-------------------------------------------------|------------------------|------------------------------------------------------------------|

ILS or LOC RWY 16R  
SALT LAKE CITY INTL (SLC)

|                                                                                                                                                 |            |                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| RNP APCH - GPS. From EKKHO or WEBER.<br>DME or RADAR required.                                                                                  | ALSF-2<br> | MISSED APPROACH: Climb to 4800 then climbing right turn to 8100 on heading 310° and on TCH VORTAC R-249 to STACO INT/TCH 20 DME and hold. |
| Simultaneous approach authorized. For inop ALS, increase S-LOC 16R Cat A and B visibilities to RVR 5500, and Cat C and D visibilities to 1½ SM. |            |                                                                                                                                           |

|                                 |                                              |                                             |                                 |                                  |       |
|---------------------------------|----------------------------------------------|---------------------------------------------|---------------------------------|----------------------------------|-------|
| D-ATIS<br><b>124.75 125.625</b> | SALT LAKE CITY APP CON<br><b>125.7 284.6</b> | SALT LAKE CITY TOWER<br><b>132.65 336.4</b> | GND CON<br><b>123.775 348.6</b> | CLNC DEL<br><b>127.3 379.975</b> | CPDLC |
|---------------------------------|----------------------------------------------|---------------------------------------------|---------------------------------|----------------------------------|-------|

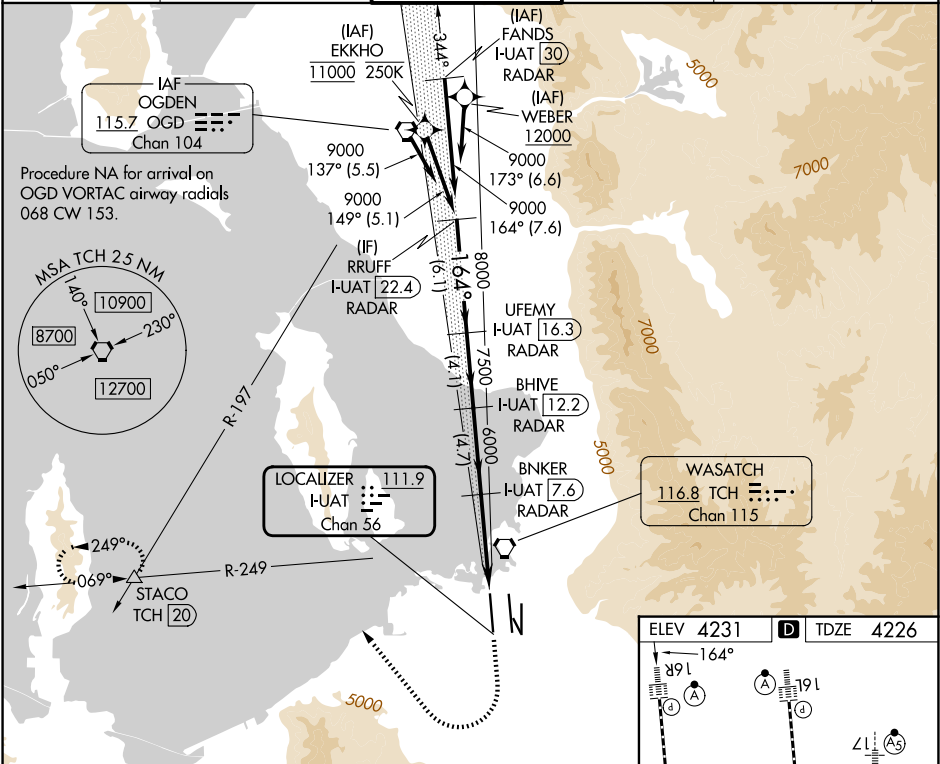

| CATEGORY  | A       | B           | C       | D           |
|-----------|---------|-------------|---------|-------------|
| S-ILS 16R | 4426/18 | 200 (200-½) |         |             |
| S-LOC 16R | 4680/24 | 454 (500-½) | 4680/45 | 454 (500-¾) |

