
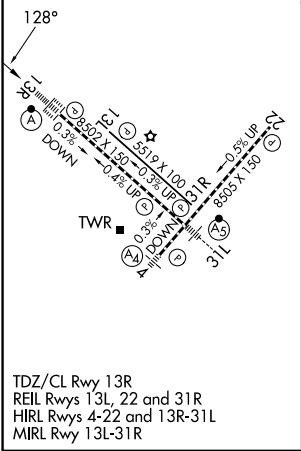


WAAS CH 82409 W13A	APP CRS 128°	Rwy Ldg TDZE 809 Apt Elev 809
--	------------------------	---

RNAV (GPS) Y RWY 13R
SAN ANTONIO INTL (SAT)

RNP APCH - GPS.				ALSF-2 	MISSED APPROACH: Climb to 3100 direct POYIG and on track 171° to EMBOW and hold.	
 Circling NA northwest of Rwy 4 and 13R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C and D visibility to 1½ SM.						
D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6	CLNC DEL 126.7	CPDLC	

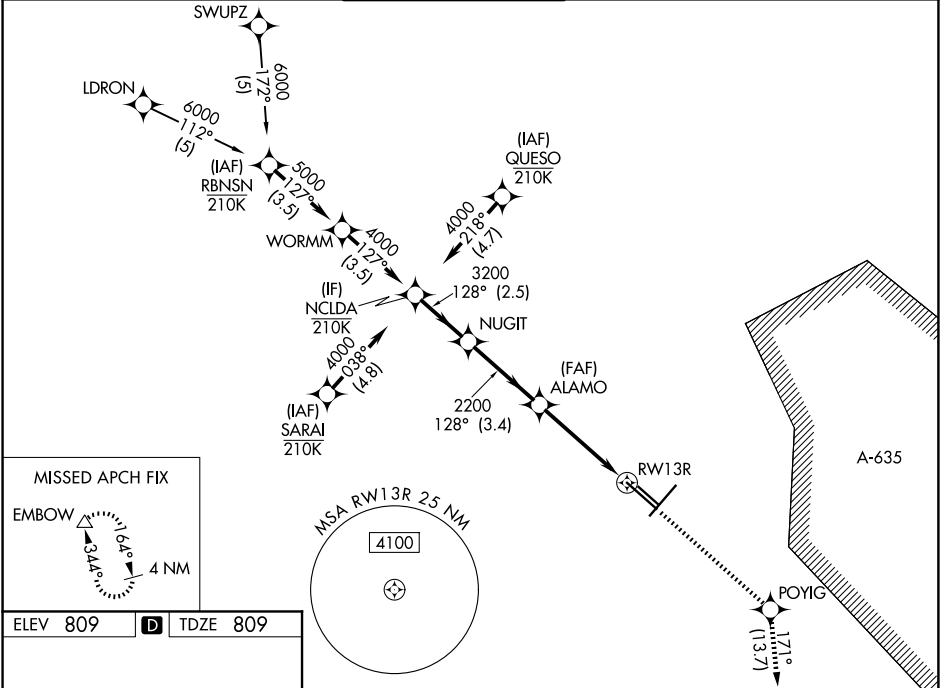

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).			
GP 3.00° TCH 58		3100 POYIG tr 171° EMBOW	
4000 128° NUGIT		2200 ALAMO	
3200		1.9 NM to RWY 13R	
2200		RWY 13R	
2.5 NM		3.4 NM	
2.3 NM		1.9 NM	
CATEGORY	A	B	C
LPV DA	1009/18	200 (200-½)	
LNAV/VNAV DA	1221/40	412 (500-¾)	
LNAV MDA	1480/24	671 (700-½)	1480-1½ 671 (700-1½)
CIRCLING	1480-1	671 (700-1)	1480-2 671 (700-2) 1520-2¼ 711 (800-2¼)

SC-3, 30 OCT 2025 to 27 NOV 2025

SC-3, 30 OCT 2025 to 27 NOV 2025