



SAN ANTONIO DEP CON  
125.7 290.225  
ATIS  
120.45 273.5  
GND CON  
121.8 289.4  
KELLY TOWER  
124.3 322.35

RNAV 1 - DME/DME IRU or GPS.  
RADAR required for non-GPS equipped aircraft.  
RADAR required.

TOP ALTITUDE:  
ASSIGNED BY ATC

NOTE: Aircraft destined for airports north/northeast of  
DFW terminal area must file the KLNGR Transition.

TAKEOFF MINIMUMS  
Rwys 16, 34: Standard.

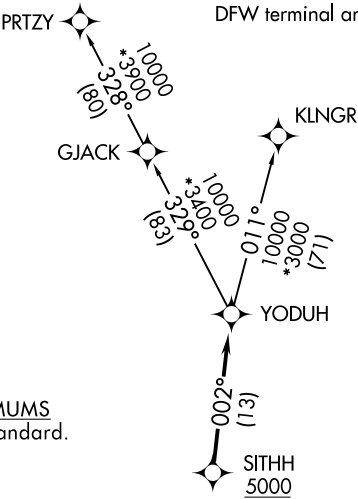

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 16: Climb on heading 158° or as assigned by ATC, for vectors to SITHH, thence. . .  
TAKEOFF RUNWAY 34: Climb on heading 338° or as assigned by ATC, for vectors to SITHH, thence. . .

. . .on track 002° to YODUH, then on transition. Maintain ATC assigned altitude.  
Expect filed altitude 10 minutes after departure.

KLNGR TRANSITION (YODUH2.KLNGR)  
PRTZY TRANSITION (YODUH2.PRTZY)