


WAAS CH 58015 W19A	APP CRS 194°	Rwy Ldg 8650 TDZE 11 Apt Elev 13
--	------------------------	---

RNAV (GPS) RWY 19L
SAN FRANCISCO INTL (SFO)

RNP APCH - GPS.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For inop ALS, increase LPV DA* (CG 357) all Cats visibility to RVR 4500. For inop ALS, increase LNAV/VNAV all Cats visibility to 2½ SM and LNAV Cats C and D visibility to 3 SM.	MAISF	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct PRTLA and hold. *Missed approach requires minimum climb of 357 feet per NM to 2000.
------------------------	--	--------------	--

D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL	CPDLC
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8	118.2	

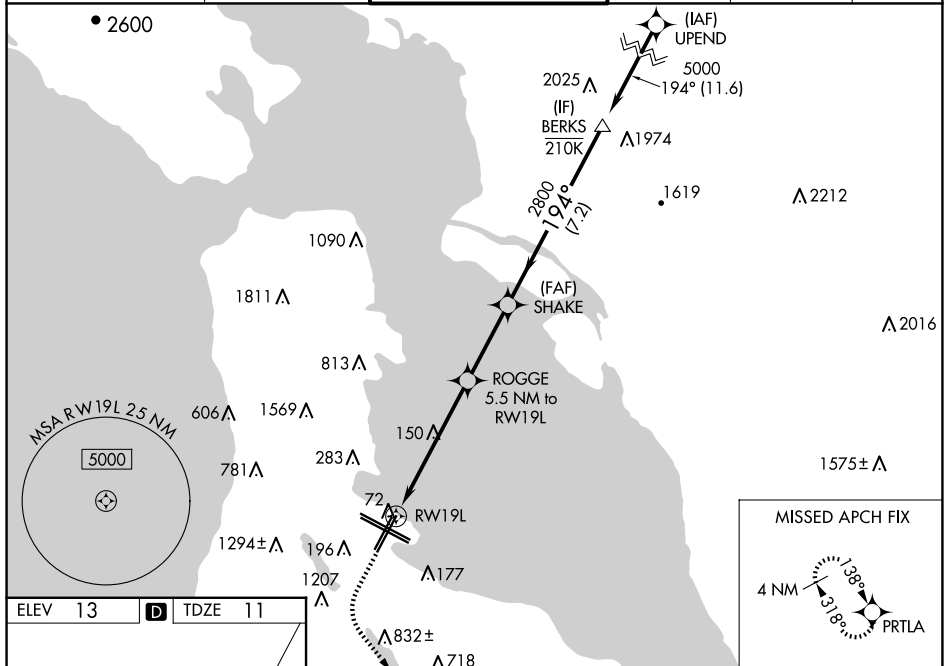

CATEGORY	A	B	C	D
LPV DA*	293/40	282 (300-¾)		
LPV DA	656-1½	645 (700-1½)		
LNNAV/VNAV DA*	350/40	339 (400-¾)		
LNNAV/VNAV DA	794-2	783 (800-2)		
LNNAV MDA	1100/55 1089 (1100-1)	1100-1¼ 1089 (1100-1¼)	1100-2½	1089 (1100-2½)