



WAAS CH 99502 W20A	APP CRS 196°	Rwy Ldg TDZE 54 Apt Elev 56
--	------------------------	---

RNAV (GPS) Y RWY 20R

JOHN WAYNE/ORANGE COUNTY (SNA)

RNP APCH - GPS. RADAR required.		MALSR 	MISSED APPROACH: Climb to 3000 direct MINOE.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. Circling Rwy 20L NA at night. For inop ALS increase LNAV/VNAV visibility to 1 3⁄8 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.			

D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER ★ 126.8 (CTAF) 0 343.625	GND CON 120.8	UNICOM 122.95
------------------------	-------------------------------------	---	-------------------------	-------------------------

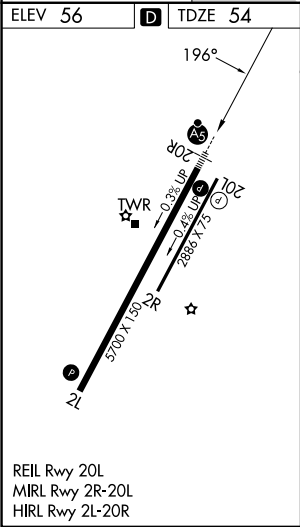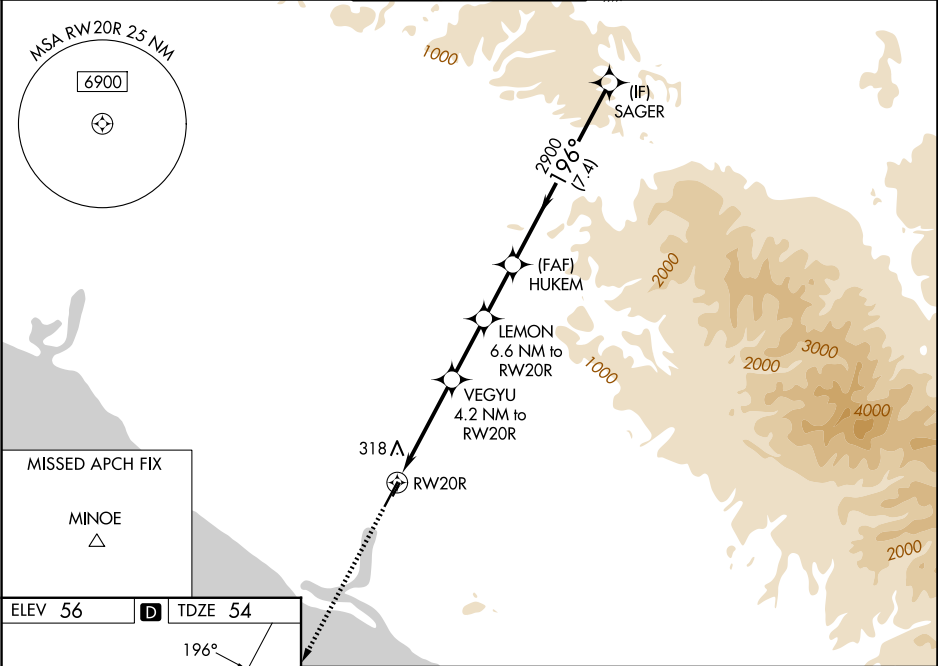

3000

↑

MINOE

△

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 68).

HUKEM

2900

SAGER

3500

VEGYU

4.2 NM to RW20R

LEMOM

6.6 NM to RW20R

1.5 NM to RW20R

1420

2200

2900

196°

GP 3.00°

TCH 51

RW20R

1.5 NM

2.7 NM

2.5 NM

2.2 NM

7.4 NM

CATEGORY	A	B	C	D
LPV DA*	255/24		201 (200-½)	
LNAV/VNAV DA	516/50		462 (500-1)	
LNAV MDA	580/24	526 (600-½)	580/55 526 (600-1)	
CIRCLING	640-1	584 (600-1)	840-2¼ 784 (800-2¼)	1180-3 1124 (1200-3)