
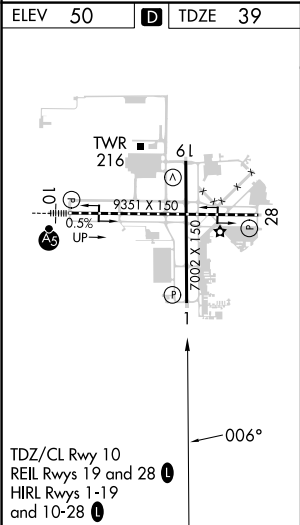


WAAS CH 45515 W01A	APP CRS 006°	Rwy Ldg 7002 TDZE 39 Apt Elev 50
--	------------------------	---

RNAV (GPS) RWY 1

SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH.				MISSED APPROACH: Climb to 2500 direct SUTME and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).					
ATIS 123.75	SAVANNAH APP CON★ 125.3 371.875	SAVANNAH TOWER★ 125.975 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775	UNICOM 122.95

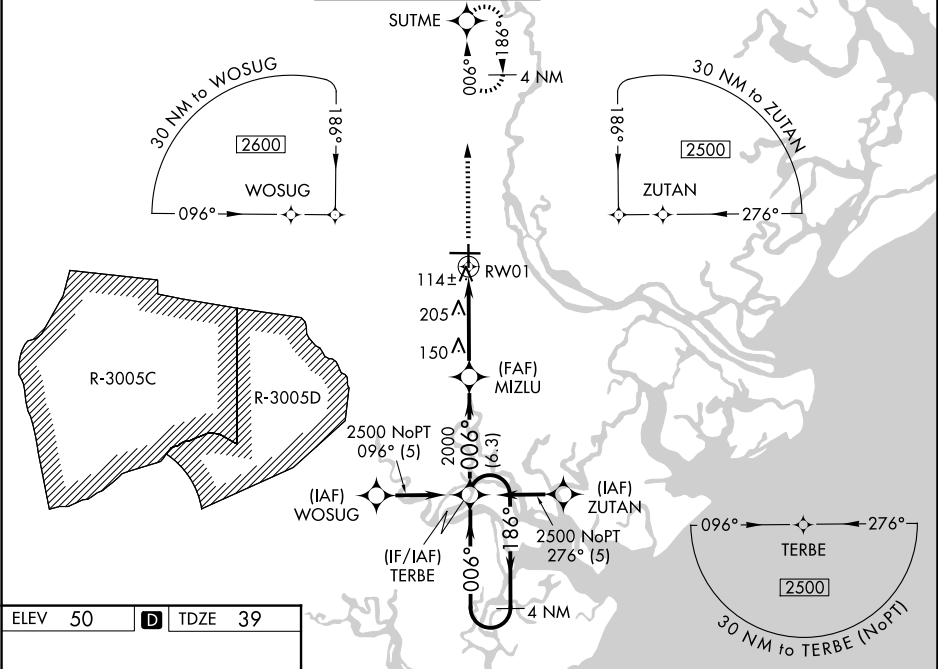

2500 ↑	SUTME ✦	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).			
*LNNAV only.		MIZLU 2000	TERBE	4 NM Holding Pattern	
*1.3 NM to RW01		2000	186°	2500	
RW01		006°	←006°	GP 3.00° TCH 57	
1.3 NM		4.6 NM	6.3 NM		
CATEGORY	A	B	C	D	
LPV DA	239/40 200 (200-¾)				
LNNAV/ VNAV DA	384/60 345 (400-1¼)				
LNNAV MDA	520/55	481 (500-1)	520-1⅓	481 (500-1⅓)	
CIRCLING	520-1	470 (500-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)	