



VORTAC ACT 115.3 Chan 100	APP CRS 321°	Rwy Ldg 5103 TDZE 516 Apt Elev 516
---	------------------------	---

VOR/DME RWY 32
WACO RGNL (ACT)


V VDP NA with Mc Gregor Exec altimeter setting. When local altimeter setting
A not received use Mc Gregor Exec altimeter setting and increase all MDA 40
feet; increase S-32 Cats C/D visibility $\frac{1}{8}$ mile and Circling Cat D visibility $\frac{1}{4}$ mile.
ASR

MISSED APPROACH: Climb to 3000 direct ACT VORTAC and hold, continue climb-in-hold to 3000.

ATIS 123.85	WACO APP CON ★ 127.65 227.125	WACO TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

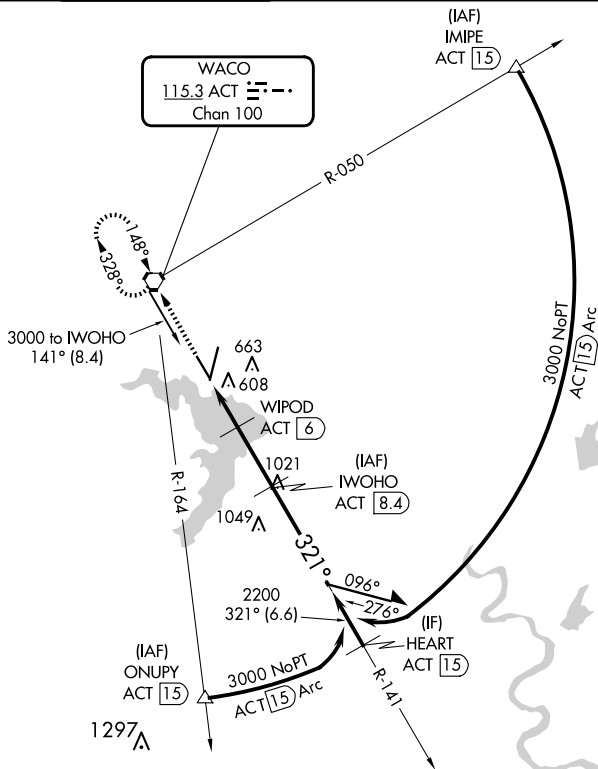

ELEV 516	D	TDZE 516
----------	----------	----------

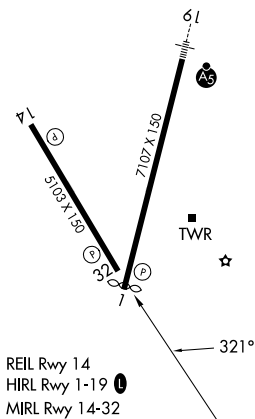

3000 ↑	ACT ⬡				
CATEGORY	A	B	C	D	
S-32	860-1 344 (400-1)				
C CIRCLING	940-1 424 (500-1)	980-1 464 (500-1)	1020-1½ 504 (600-1½)	1160-2 644 (700-2)	