

WAAS CH 90299 W20A	APP CRS 202°	Rwy Ldg 6527 TDZE 1194 Apt Elev 1194
--	------------------------	---

RNAV (GPS) RWY 20
WALLA WALLA RGNL (ALW)

RNP APCH - GPS.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to 1½ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH:
Climb to 4000 direct
CILON and hold.

ASOS 135.875	SPOKANE APP CON★ 133.15 379.15	WALLA WALLA TOWER★ 118.5 (CTAF) L 289.4	GND CON 121.6 289.4	UNICOM 122.95
-----------------	-----------------------------------	---	------------------------	------------------

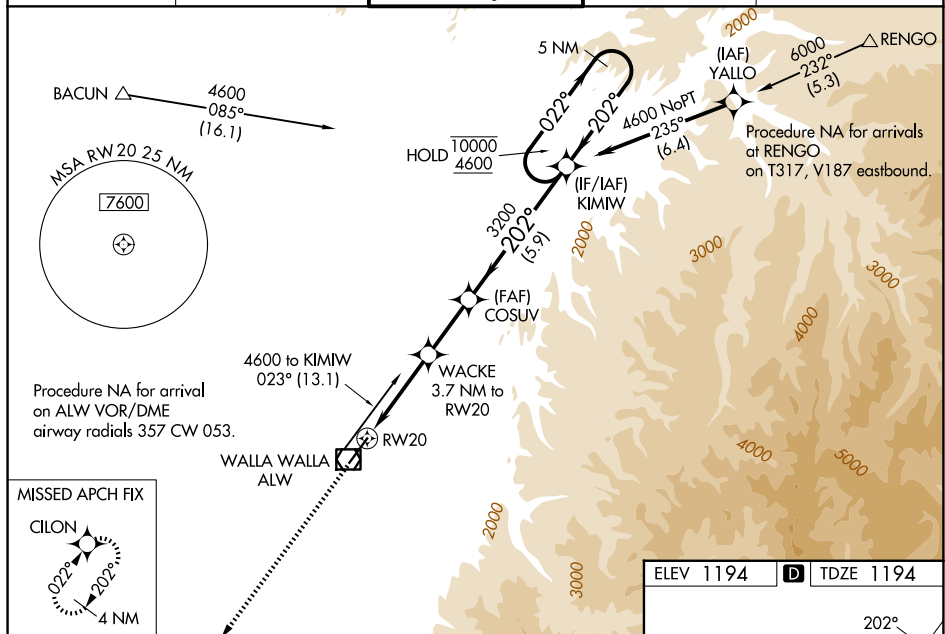


Diagram illustrating the 5 NM Holding Pattern for RW20. The pattern is defined by a 5 NM circle centered on the fix at 3200. The holding pattern is a 5 NM circle. The diagram shows the approach from the south, with a 2.9 NM turn to RW20, a 0.9 NM turn to the fix, and a 2.4 NM turn to the holding pattern. The holding pattern is a 5 NM circle. The diagram also shows the distance from the fix to the holding pattern (5.9 NM) and the distance from the holding pattern to the fix (5.9 NM). The diagram includes a scale bar from 0 to 5.9 NM. The diagram also shows the distance from the fix to the holding pattern (5.9 NM) and the distance from the holding pattern to the fix (5.9 NM). The diagram includes a scale bar from 0 to 5.9 NM.

CATEGORY	A	B	C	D
LPV DA*	1394/24 200 (200-½)			
RNAV/ VNAV DA	1773-1¼ 579 (600-1¼)			
RNAV MDA	2160/40 966 (1000-¾)	2160/55 966 (1000-1)	2160-2½	966 (1000-2½)
CIRCLING	2160-1¼ 966 (1000-1¼)	2160-1½ 966 (1000-1½)	2160-3 966 (1000-3)	2300-3 1106 (1200-3)

