

APP CRS 007°	Rwy Ldg 6869 TDZE 14 Apt Elev 14
------------------------	---

RNAV (RNP) RWY 1

RONALD REAGAN WASHINGTON NTL (DCA)

T For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 48°C (120°F). RF required. GPS required. Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30 all Cats visibility to 1¾ mile.

ALSF-2



MISSED APPROACH: (Do not exceed 185K until FIVUD) Climb to 2200 left turn to FIVUD and on track 327° to HESLO and on track 327° to GTN NDB and hold.



D-ATIS 132.65	POTOMAC APP CON 119.85 239.25 (W/S) 124.2 360.8 (E)	WASHINGTON TOWER 119.1 257.6	GND CON 121.7 257.6
-------------------------	---	--	-------------------------------

MISSED APCH FIX



GEORGETOWN
GTN

Prohibited area (P-56) 1.5 NM north of DCA- avoid surface to 18000 MSI.

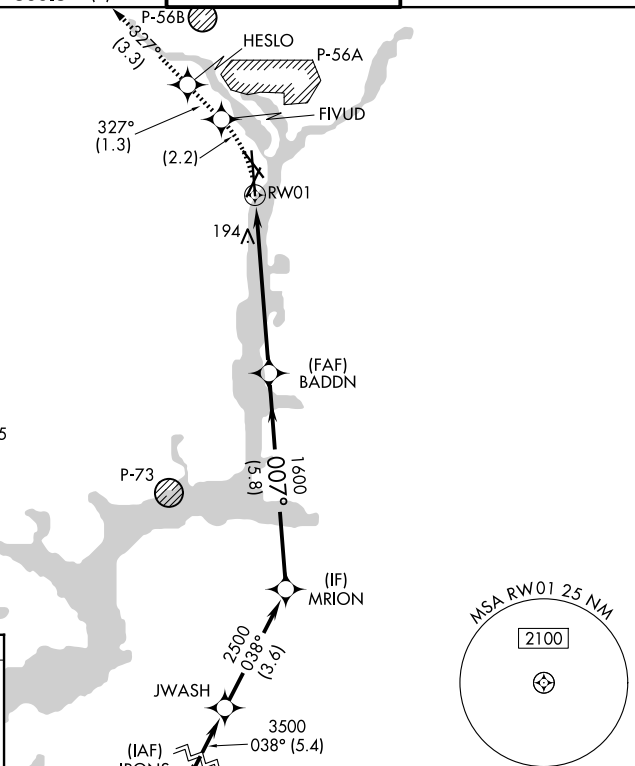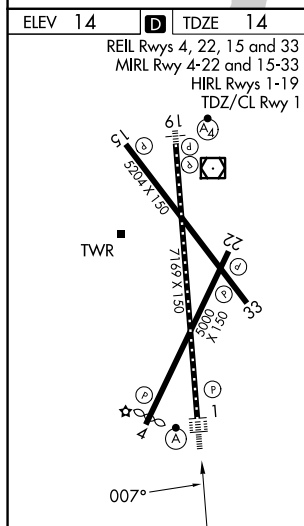

2200 ↑	FIVUD tr 327°	HESLO tr 327°	GTN 	
CATEGORY	A	B	C	D
RNP 0.30 DA	552/60		538 (600-1¼)	