
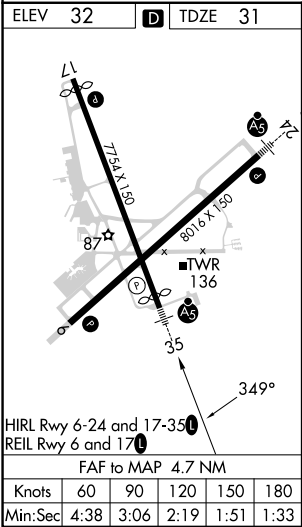


LOC I-ILM 110.3	APP CRS 349°	Rwy Idg TDZE Apt Elev 7204 31 32
---------------------------	------------------------	--

ILS Y or LOC RWY 35

WILMINGTON INTL (ILM)

ADF required. RADAR required for procedure entry.		MALSR	MISSED APPROACH: Climb to 600 then climbing left turn to 1800 direct AIRL LOM and hold.		
For inop ALS, increase S-LOC 35 Cat C/D visibility to 1½ SM.					
ATIS 124.975	WILMINGTON APP CON★ 118.25 284.65 (164°-343°) 135.75 317.425 (344°-163°)	WILMINGTON TOWER★ 119.9 (CTAF) 0 239.3	GND CON 121.9 348.6	CLNC DEL 120.875	UNICOM 122.95

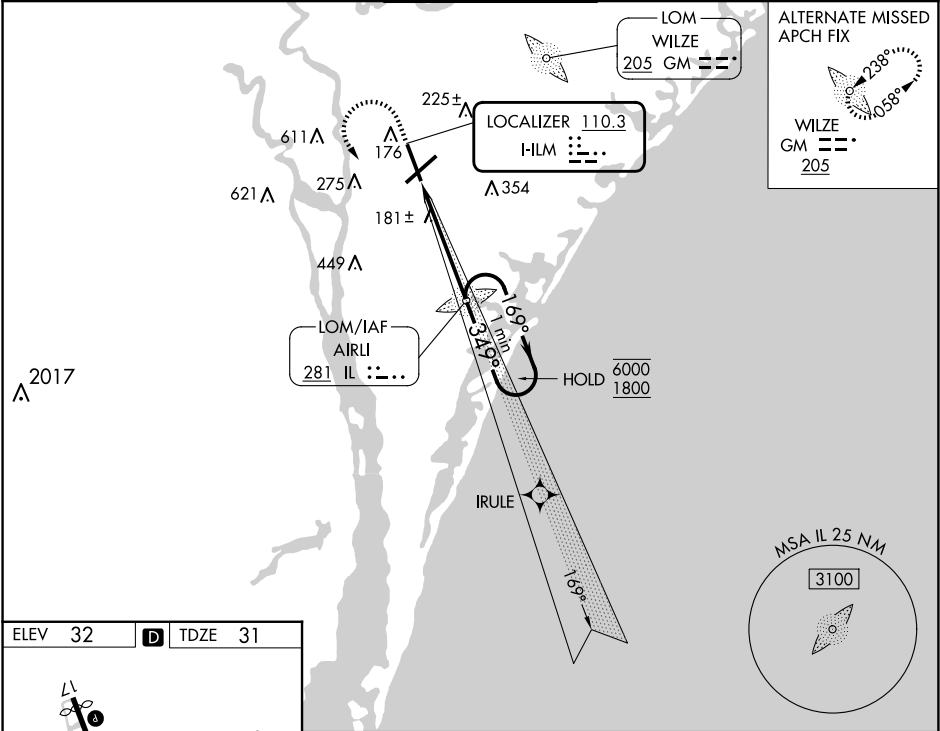

							One Minute Holding Pattern				
600		1800	IL	IL LOM		1576		169° → 6000 ← 349° 1800			
						349°		1700			
				4.7 NM		GS 3.00° TCH 37					
CATEGORY		A		B				C		D	
S-ILS 35		242/24 211 (300-½)									
S-LOC 35		500/24 469 (500-½)						500/50 469 (500-1)			
CIRCLING		560-1 528 (600-1)				720-2 688 (700-2)		920-3 888 (900-3)			