


WAAS CH 78144	APP CRS 053°	Rwy Ldg TDZE 716	7543
W05A		Apt Elev	716

RNAV (GPS) RWY 5

WILLOW RUN (YIP)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct SVM VORTAC and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000, LNAV Cats C/D visibility to 1½ SM.		

ATIS 127.425	DETROIT APP CON 118.95 284.0	WILLOW RUN TOWER 125.275 256.9	GND CON 119.975
------------------------	--	--	---------------------------

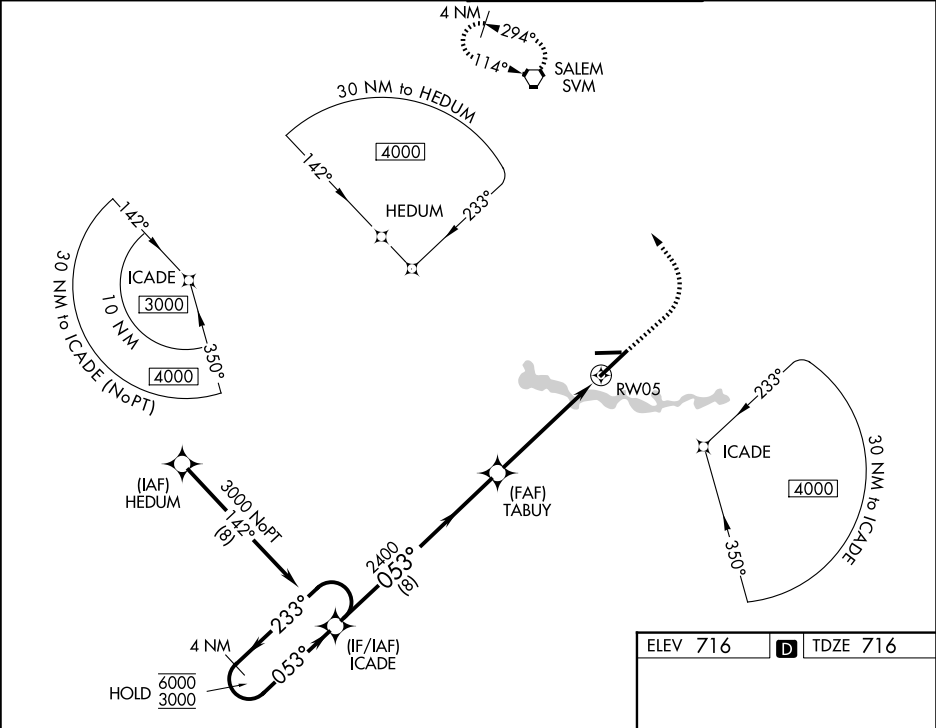

ELEV 716	D	TDZE 716
----------	----------	----------

4 NM Holding Pattern ICADE TABUY GP 3.00° TCH 59 8 NM 3.9 NM 1.2		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).		1200	3000	SVM
		6000 ← 233° 3000 → 053° 053° 2400 1.2 NM to RW05 RW05		1200 3000 SVM		
CATEGORY	A	B	C	D		
LPV DA	916/18		200 (200-½)			
LNAV/VNAV DA	1121/40		405 (500-¾)			
LNAV MDA	1200/24	484 (500-½)	1200/50	484 (500-1)		
CIRCLING	1220-1	504 (600-1)	1220-1½ 504 (600-1½)	1400-2¼ 684 (700-2¼)		

