

|          |           |        |
|----------|-----------|--------|
| APCH CRS | Rwy Idg   | 13,440 |
| 355°     | TDZE      | 1354   |
|          | Arpt Elev | 1382   |


AL-482 (USAF)

ALTUS AFB (KLTS)

|                                                                                                                 |        |                                                                 |
|-----------------------------------------------------------------------------------------------------------------|--------|-----------------------------------------------------------------|
| RNP AR APCH - RF                                                                                                | ALSF-1 | MISSED APPROACH: Climb to 4000 on track 355° to MRTHA and hold. |
| ▼ * When ALS inop, increase RVR to 45, vis to 7/8 mile.<br>** When ALS inop, increase RVR to 55, vis to 1 mile. |        |                                                                 |

|                      |                        |                        |                         |                          |
|----------------------|------------------------|------------------------|-------------------------|--------------------------|
| ATIS★<br>109.8 273.5 | APP CON<br>125.1 353.7 | TOWER★<br>119.65 254.4 | GND CON<br>121.85 275.8 | CLNC DEL<br>120.65 284.7 |
|----------------------|------------------------|------------------------|-------------------------|--------------------------|

For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C.

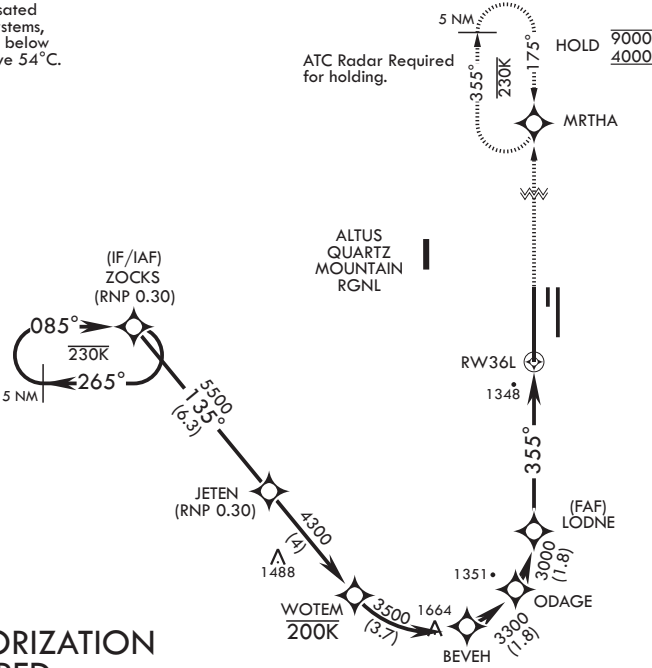

AUTHORIZATION  
REQUIRED  
FOR USE BY 97  
AMW ACFT ONLY  
EMERG SAFE ALT 100 NM 4900

